


型号 : FEN14WR-P5-G1 28HZ9x 24V280D R22L02

- 01/3

## 尺寸

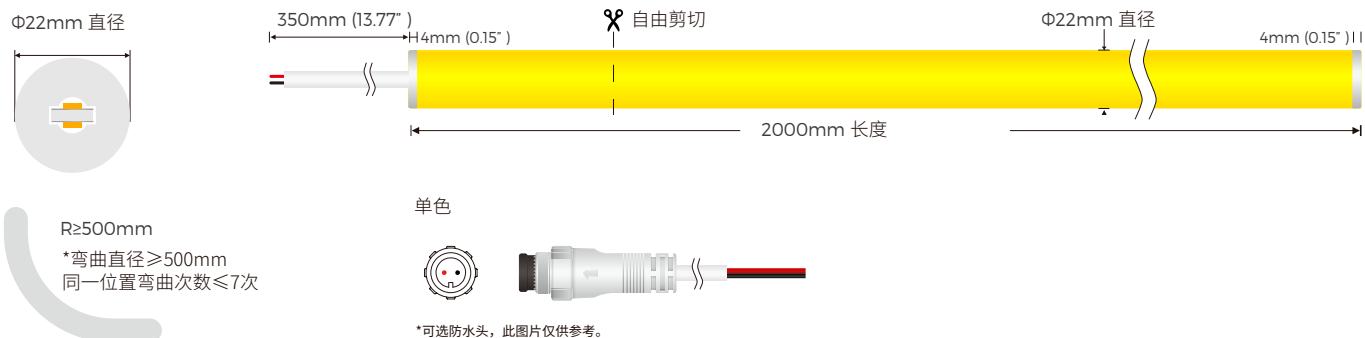


## 配件清单

| 产品名称      | 数量   |
|-----------|------|
| 1. 首端尾端堵头 | 2pc  |
| 2. 透明卡扣   | 5pc  |
| 3. 胶水     | 2pc  |
| 4. 螺钉     | 10pc |

更多产品配件请参阅产品说明书。



## 电源连接图

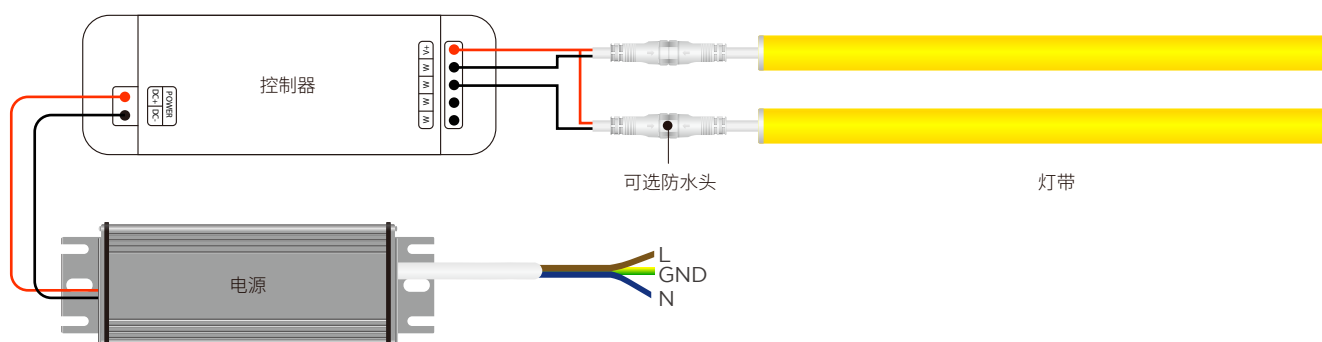


## 推荐的电源

| 编号                    | 描述                     | 输入电压    | 输出电压        | 调光 | 尺寸            |
|-----------------------|------------------------|---------|-------------|----|---------------|
| DVH75-24-P7-G1LS AL   | Waterproof Driver 75W  | 220-240 | DC24V 3.12A | NO | 165×60×36.5mm |
| DVH100-24-P7-G1 LS AL | Waterproof Driver 100W | 220-240 | DC24V 4.16A | NO | 167×60×34.6mm |
| DVH150-24-P7-G1 LS AL | Waterproof Driver 150W | 220-240 | DC24V 6.25A | NO | 167×60×34.6mm |
| DVH200-24-P7-G1LS AL  | Waterproof Driver 200W | 220-240 | DC24V 8.33A | NO | 216×65×39.5mm |
| DVH300-24-P7-G1 LS AL | Waterproof Driver 300W | 220-240 | DC24V 12.5A | NO | 265×65×39.5mm |

## ① 卡子

通过螺钉固定卡子。

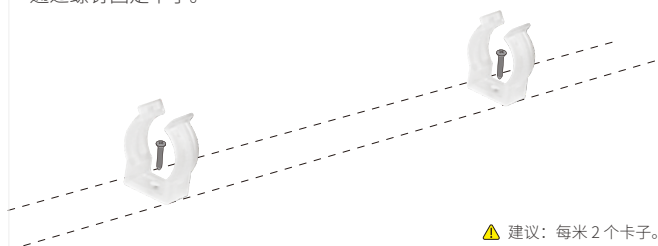

从两端同时安装。




## ① 剪切




## ② 安装堵头

在尾部涂抹硅胶并安装堵头。

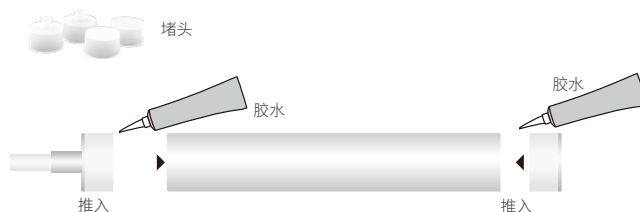

## 注意事项

禁止踩踏

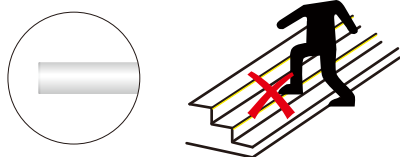

禁止拉扯



## 包装

| N.W / CTN(KG) | QTY/CTN(卷) | G.W/CTN(KG) | CTN 尺码(cm) |
|---------------|------------|-------------|------------|
| /             | /          | /           | /          |

