




## 软灯条/乐尊/24W/3D软洗墙灯/IP67/一代/3030/RA90

型号 : IP67 FHW24WTS-P7-G1 30NW9x 24V24S1 2716L05 Dx

- 3D弯曲和顶部照明，双色硅胶挤出。
- 防紫外线和防黄，IP67和防盐雾。
- L70B50>50000小时，UL 94 V-0。
- 易于安装。
- 最小顶部弯曲半径15cm，最小侧面弯曲半径40cm。
- 光束角度为20°、30°、45°、60°、25°x 45°。

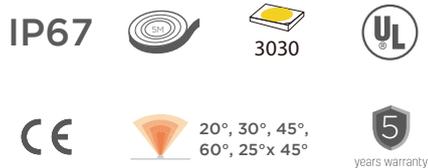


### 技术细节


|       |  |
|-------|--|
| 型号    | FHW24WTS-P7-G1 30NW9x 24V24S1 2716L05 Dx |
| 功率    | 24W/M 7.31W/ft                           |
| 电压    | DC24V                                    |
| 显色指数  | 90 (3030LEDs)                            |
| LED数量 | 24 LEDs/M                                |
| 长度    | 5M                                       |
| 工作温度  | -40°C ~ +55°C                            |
| 储存温度  | -40°C ~ +85°C                            |
| 电压范围  | 23 ~ 25V dc                              |
| 反向电压  | 25 V dc                                  |

### 配光曲线

发光强度分布图



C0等高线平面图 (单位: lx)

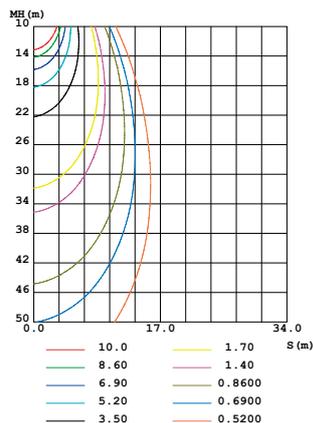


### 每米光通量


| 色温    | 20°    | 30°    | 45°    | 60°    | 25°x 45° |
|-------|--------|--------|--------|--------|----------|
| 2700K | 1965lm | 1925lm | 1750lm | 1750lm | 1785lm   |
| 3000K | 1965lm | 1925lm | 1750lm | 1750lm | 1785lm   |
| 4000K | 2120lm | 2080lm | 1890lm | 1890lm | 1930lm   |
| 5000K | 2245lm | 2200lm | 2000lm | 2000lm | 2040lm   |

(ErP Class: G)


尺寸

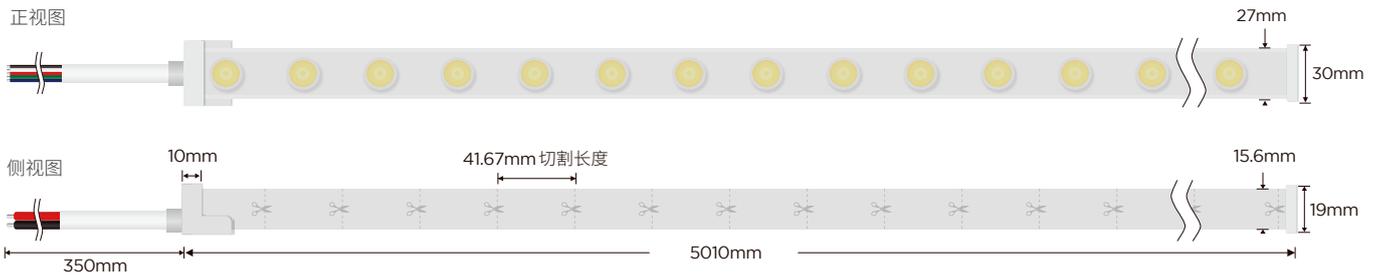

20°

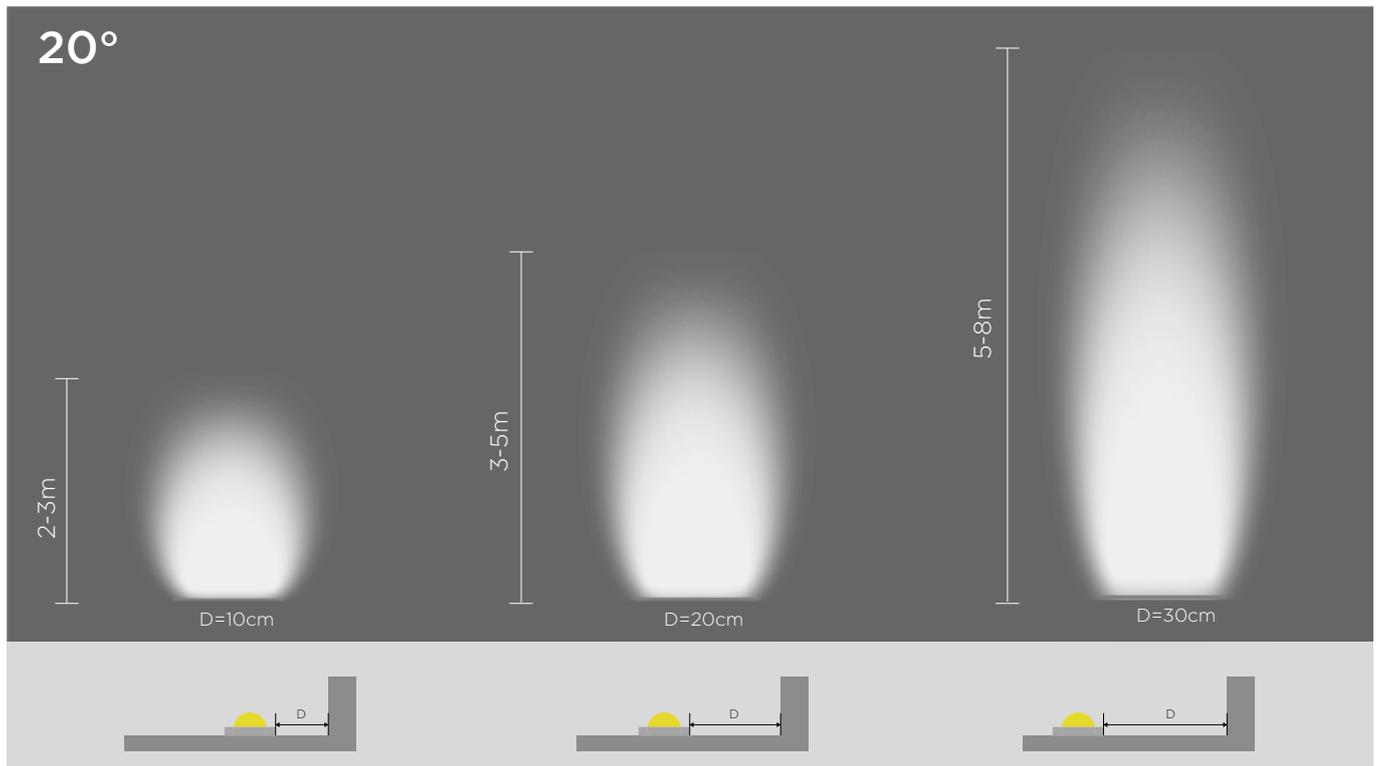


电源连接图

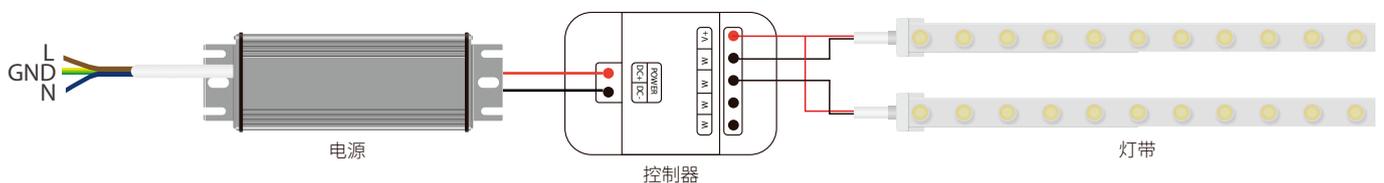

推荐的电源


| 编号                    | 描述                     | 输入电压    | 输出电压        | 调光 | 尺寸          |
|-----------------------|------------------------|---------|-------------|----|-------------|
| DVH75-24-P7-G1LS AL   | Waterproof Driver 75W  | 220-240 | DC24V 3.12A | NO | 165×60×36.5 |
| DVH100-24-P7-G1 LS AL | Waterproof Driver 100W | 220-240 | DC24V 4.16A | NO | 167×60×34.6 |
| DVH150-24-P7-G1 LS AL | Waterproof Driver 150W | 220-240 | DC24V 6.25A | NO | 167×60×34.6 |
| DVH200-24-P7-G1LS AL  | Waterproof Driver 200W | 220-240 | DC24V 8.33A | NO | 216×65×39.5 |
| DVH300-24-P7-G1 LS AL | Waterproof Driver 300W | 220-240 | DC24V 12.5A | NO | 265×65×39.5 |

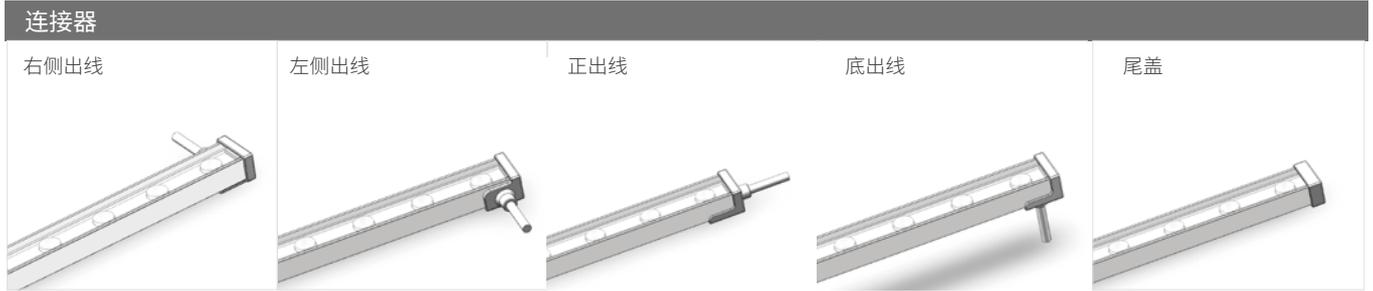

**型材清单**


|                 | 尺寸          | 剖面图 | 安装剖面图                     |
|-----------------|-------------|-----|---------------------------|
| <p>铝型材</p>      | 21.5x31.1mm |     |                           |
| <p>不锈钢可弯折型材</p> | 28.4x17mm   |     |                           |
|                 | 31.1x21.5mm |     |                           |
|                 | 26x29mm     |     | <p>*最大旋转角度180° 单位: mm</p> |

**安装方式**  
顶部弯曲/侧面弯曲系列正确的弯曲方式

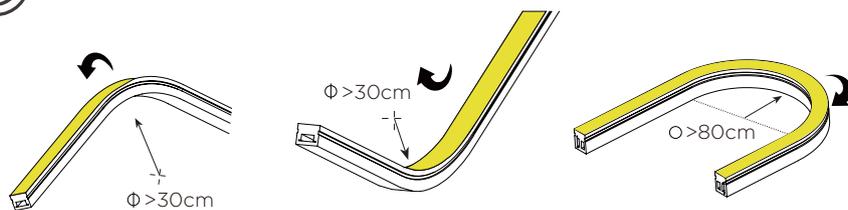

① 卡箍的安装


通过螺钉固定卡子和铝型材。

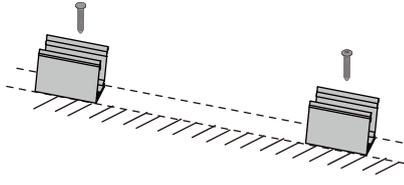


⚠ 建议：每米2个夹子。

② 安装

同时安装霓虹灯从两端开始。



应使用工具在移除霓虹灯。

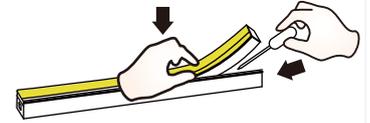

包装

| 毛重 (Kg) | 净重 (Kg) | 箱 (卷/箱) | 箱子尺寸 (mm)     |
|---------|---------|---------|---------------|
| 18      | 16.8    | 6 (30米) | 580*570*295mm |

