


室内灯具光度数据


灯具名称: 软灯条	灯具类型:	灯具重量
灯具规格: FEN14CS-P7-G1 50ZRGB 24V60S 1018L05	外型尺寸: 1	测试编号:
制造厂商: LEDMY	发光口面: 0.008*1	遮光角:

光源数据		光度数据				光效: 10.71 lm/W
型号		峰值光强(cd)	55.60	S/MH(C0/180)	1.24	
标称功率(W)	4.478	灯具效率(%)	100.0	S/MH(C90/270)	1.26	
额定电源电压(V)	24	总光通量(lm)	160.38	η UP, DN(C0-180)	0.9, 49.1	
额定光通量(lm)	160.383	CIE分类	直接	η UP, DN(C180-360)	0.9, 49.1	
灯具内光源数(只)	1	上射光通比(%)	1.8	CIBSE SHR NOM	1.25	
实测电源电压(V)	24	下射光通比(%)	98.2	CIBSE SHR MAX	1.35	

室内灯具配光曲线

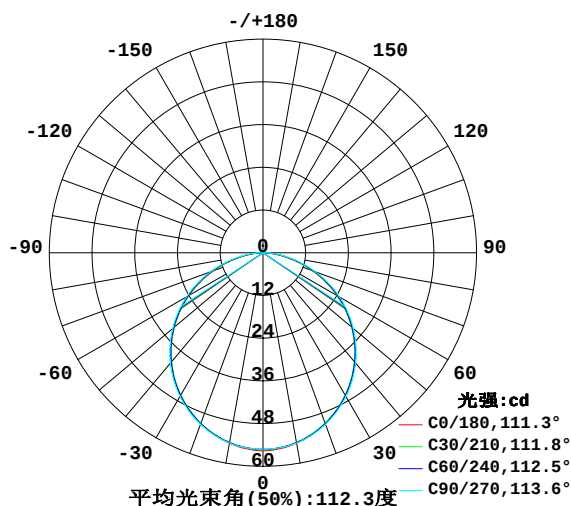

空间等照度曲线(单位: lx)

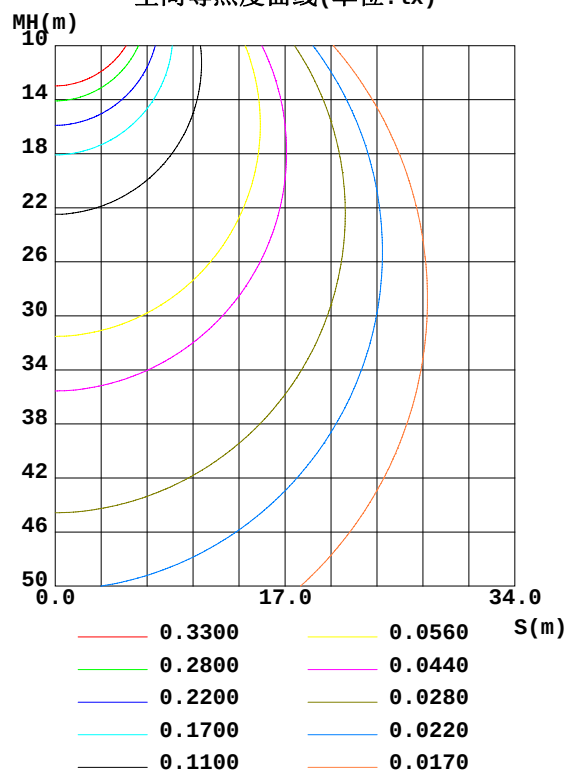

C角度范围: 0度 - 90度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2019-02-12

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.0.362
环境湿度: 65.0%
测试距离: 12.226米 [K=1.0000]
备注:

灯具环带光通量

环带光通量:

γ	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma(^{\circ})$	Φ 环	Φ 总	%lum, lamp
10	54.34	54.01	54.24	54.01	54.34	54.01	54.24	54.01	0- 10	5.217	5.217	3.25, 3.25
20	51.15	50.96	51.30	50.96	51.15	50.96	51.30	50.96	10- 20	14.90	20.11	12.5, 12.5
30	46.29	46.23	46.63	46.23	46.29	46.23	46.63	46.23	20- 30	22.52	42.63	26.6, 26.6
40	39.99	40.05	40.49	40.05	39.99	40.05	40.49	40.05	30- 40	27.12	69.75	43.5, 43.5
50	32.51	32.67	33.15	32.67	32.51	32.67	33.15	32.67	40- 50	28.18	97.93	61.1, 61.1
60	24.01	24.33	24.81	24.33	24.01	24.33	24.81	24.33	50- 60	25.58	123.5	77, 77
70	14.78	15.25	15.78	15.25	14.78	15.25	15.78	15.25	60- 70	19.63	143.1	89.2, 89.2
80	5.630	6.239	6.818	6.239	5.630	6.239	6.818	6.239	70- 80	11.24	154.4	96.3, 96.3
90	0.1417	0.5690	0.9653	0.5690	0.1417	0.5690	0.9653	0.5690	80- 90	3.139	157.5	98.2, 98.2
100	0.1485	0.2815	0.2345	0.2815	0.1485	0.2815	0.2345	0.2815	90-100	0.3016	157.8	98.4, 98.4
110	0.2502	0.3675	0.2580	0.3675	0.2502	0.3675	0.2580	0.3675	100-110	0.2947	158.1	98.6, 98.6
120	0.3909	0.4613	0.3909	0.4613	0.3909	0.4613	0.3909	0.4613	110-120	0.3634	158.5	98.8, 98.8
130	0.4765	0.5629	0.4920	0.5629	0.4765	0.5629	0.4920	0.5629	120-130	0.4205	158.9	99.1, 99.1
140	0.5238	0.6567	0.5470	0.6567	0.5238	0.6567	0.5470	0.6567	130-140	0.4368	159.3	99.3, 99.3
150	0.6176	0.7428	0.6332	0.7428	0.6176	0.7428	0.6332	0.7428	140-150	0.4073	159.7	99.6, 99.6
160	0.6643	0.8131	0.7424	0.8131	0.6643	0.8131	0.7424	0.8131	150-160	0.3368	160.1	99.8, 99.8
170	0.7583	0.8756	0.7817	0.8756	0.7583	0.8756	0.7817	0.8756	160-170	0.2253	160.3	99.9, 99.9
180	0.8990	0.9068	0.8990	0.9068	0.8990	0.9068	0.8990	0.9068	170-180	0.0825	160.4	100, 100
单位:°	光强:cd									单位:lm		

锥面光通量(90度): 83.937 lm

%lum = 52.3%

%lamp = 52.3%

锥面光通量(120度): 123.51 lm

%lum = 77.0%


%lamp = 77.0%

C角度范围: 0度 - 90度
 C角度间隔: 15.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员:
 测试日期: 2019-02-12

γ 角度范围: 0度 - 180度
 γ 角度间隔: 1.0度
 测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.362
 环境湿度: 65.0%
 测试距离: 12.226米 [K=1.0000]
 备注:

灯具亮度限制曲线

灯具名称：软灯条	灯具类型:DT 5050 24V60灯 RGB 霓虹灯重量18 1M 成品	
灯具规格:DT 5050 24V60灯 RGB 霓虹 1018 1M 成品	外型尺寸: 1	测试编号:
制造厂商: LEDMY	发光口面:0.008*1	遮光角:

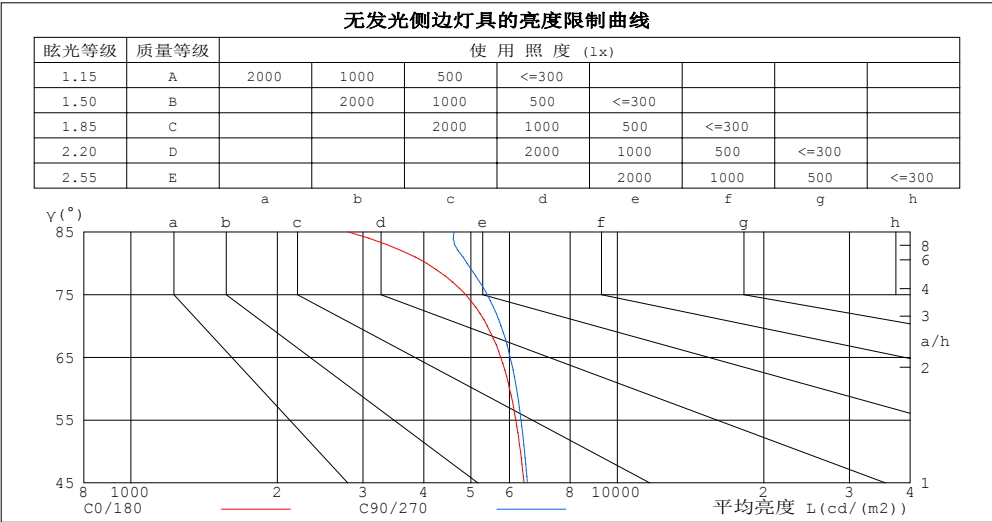

平均亮度值 cd/ (m2)		
Y (°)	C0/180	C90/270
85	2792	4619
80	4053	4908
75	4879	5400
70	5403	5766
65	5758	6022
60	6002	6203
55	6185	6340
50	6321	6446
45	6432	6532

C角度范围: 0度 - 90度
C角度间隔: 15.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2019-02-12

Y角度范围: 0度 - 180度
Y角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.362
环境湿度:65.0%
测试距离:12.226米 [K=1.0000]
备注:

墙面和天花板利用系数

灯具名称: 软灯条	灯具类型:DT 5050 24V60灯 RGB 霓虹 1018 1M 成品	
灯具规格:DT 5050 24V60灯 RGB 霓虹 1018 1M 成品	外型尺寸: 1	测试编号:
制造厂商: LEDMY	发光口面:0.008*1	遮光角:

顶棚	80%	70%	50%	30%	10%	0
墙面	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
地板	20%	20%	20%	20%	20%	0
室空间比	墙 壁 面 利 用 系 数					
0.0						
1.0	.311 .177 .056	.303 .173 .055	.289 .166 .053	.276 .159 .051	.264 .153 .049	
2.0	.292 .160 .049	.286 .157 .048	.273 .152 .047	.261 .147 .046	.250 .142 .045	
3.0	.270 .144 .043	.264 .142 .043	.253 .137 .042	.243 .133 .041	.233 .129 .040	
4.0	.249 .130 .038	.244 .128 .038	.234 .124 .037	.225 .121 .036	.216 .117 .036	
5.0	.230 .117 .034	.226 .116 .034	.217 .113 .033	.208 .110 .033	.201 .107 .032	
6.0	.214 .107 .031	.209 .106 .030	.201 .103 .030	.194 .101 .030	.187 .098 .029	
7.0	.199 .098 .028	.195 .097 .028	.188 .095 .027	.181 .093 .027	.175 .091 .027	
8.0	.186 .091 .025	.182 .090 .025	.176 .088 .025	.170 .086 .025	.164 .084 .025	
9.0	.174 .084 .023	.171 .083 .023	.165 .082 .023	.160 .080 .023	.154 .078 .023	
10.0	.163 .078 .022	.161 .078 .022	.155 .076 .021	.150 .075 .021	.146 .073 .021	

顶棚	80%	70%	50%	30%	10%	0
墙面	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	50% 30% 10%	0
地板	20%	20%	20%	20%	20%	0
室空间比	天 花 板 利 用 系 数					
0.0	.204 .204 .204	.174 .174 .174	.119 .119 .119	.068 .068 .068	.022 .022 .022	
1.0	.194 .170 .148	.166 .146 .127	.114 .100 .088	.065 .058 .051	.021 .019 .017	
2.0	.186 .146 .112	.159 .125 .097	.109 .087 .067	.063 .050 .040	.020 .016 .013	
3.0	.178 .128 .088	.153 .111 .076	.105 .077 .054	.061 .045 .032	.019 .015 .010	
4.0	.171 .115 .072	.147 .099 .063	.101 .069 .044	.058 .041 .026	.019 .013 .009	
5.0	.163 .105 .061	.140 .090 .053	.097 .063 .038	.056 .037 .022	.018 .012 .007	
6.0	.156 .096 .053	.134 .083 .046	.093 .058 .033	.054 .034 .019	.017 .011 .006	
7.0	.149 .089 .047	.129 .077 .041	.089 .054 .029	.052 .032 .017	.017 .010 .006	
8.0	.143 .084 .043	.123 .073 .037	.085 .051 .026	.050 .030 .016	.016 .010 .005	
9.0	.137 .079 .039	.118 .068 .034	.082 .048 .024	.048 .028 .015	.015 .009 .005	
10.0	.131 .074 .037	.113 .065 .032	.078 .045 .023	.046 .027 .014	.015 .009 .004	

C角度范围: 0度 - 90度
C角度间隔: 15.0度
测试速度: 快速
环境温度:25.3℃
测试人员:
测试日期:2019-02-12

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.362
环境湿度:65.0%
测试距离:12.226米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

灯具名称: 软灯条	灯具类型:DT 5050 24V60灯 RGB 霓虹 1018 1M 成品									
灯具规格:DT 5050 24V60灯 RGB 霓虹 1018 1M 成品	外型尺寸: 1					测试编号:				
制造厂商: LEDMY	发光口面:0.008*1					遮光角:				
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉 (Viewed crosswise)					向前 (Viewed endwise)				
x = 2H y = 2H	25.5	27.0	25.8	27.2	27.4	25.6	27.1	25.9	27.3	27.5
3H	27.0	28.3	27.3	28.6	28.9	27.2	28.5	27.5	28.8	29.1
4H	27.5	28.8	27.9	29.1	29.4	27.8	29.1	28.1	29.4	29.7
6H	27.9	29.1	28.3	29.4	29.8	28.2	29.5	28.6	29.8	30.1
8H	28.0	29.2	28.3	29.5	29.8	28.4	29.6	28.8	29.9	30.2
12H	28.0	29.2	28.4	29.5	29.8	28.5	29.7	28.9	30.0	30.3
4H 2H	26.1	27.4	26.4	27.7	28.0	26.2	27.5	26.5	27.8	28.1
3H	27.8	28.9	28.1	29.2	29.6	27.9	29.1	28.3	29.4	29.7
4H	28.4	29.5	28.8	29.9	30.2	28.7	29.7	29.1	30.1	30.5
6H	28.9	29.9	29.4	30.2	30.6	29.3	30.2	29.7	30.6	31.0
8H	29.1	29.9	29.5	30.3	30.8	29.5	30.3	29.9	30.7	31.2
12H	29.1	29.9	29.6	30.3	30.8	29.6	30.4	30.1	30.8	31.3
8H 4H	28.7	29.6	29.2	30.0	30.4	28.9	29.8	29.4	30.2	30.6
6H	29.3	30.1	29.8	30.5	31.0	29.7	30.4	30.1	30.8	31.3
8H	29.5	30.2	30.0	30.6	31.1	29.9	30.6	30.4	31.0	31.5
12H	29.7	30.2	30.2	30.7	31.2	30.2	30.7	30.7	31.2	31.7
12H 4H	28.7	29.5	29.2	29.9	30.4	28.9	29.7	29.4	30.1	30.6
6H	29.4	30.0	29.9	30.5	31.0	29.7	30.3	30.2	30.8	31.3
8H	29.6	30.2	30.1	30.7	31.2	30.0	30.6	30.5	31.1	31.6
不同间隔布灯时, 观察者位置引起的UGR变化:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

依据CIE Pub.117计算, 160.41m光源光通要进行修正($81\log(F/F_0) = -6.4$).

C角度范围: 0度 - 90度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2019-02-12

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.362
环境湿度: 65.0%
测试距离: 12.226米 [K=1.0000]
备注:

UF利用系数表

灯具名称: 软灯条	灯具类型:DT 5050 24V60灯 RGB 霓虹 1018 1M 成品	
灯具规格:DT 5050 24V60灯 RGB 霓虹 1018 1M 成品	外型尺寸: 1	测试编号:
制造厂商: LEDMY	发光口面:0.008*1	遮光角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$									
$k = 0.60$	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	63	56	72	65	56	48
1.25	82	72	65	81	71	64	78	69	63	56
1.50	87	77	70	86	76	70	82	74	69	61
2.00	94	86	79	92	84	78	89	82	77	68
2.50	98	90	84	96	89	83	92	86	81	72
3.00	102	95	89	99	93	88	95	90	85	76
4.00	106	100	95	103	98	94	99	94	91	81
5.00	108	103	99	105	101	97	101	97	94	84
ROOM INDEX	UF (总)									UF (直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHRNOM = 1.25			

C角度范围: 0度 - 90度
 C角度间隔: 15.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员:
 测试日期: 2019-02-12

γ角度范围: 0度 - 180度
 γ角度间隔: 1.0度
 测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.362
 环境湿度: 65.0%
 测试距离: 12.226米 [K=1.0000]
 备注:

灯具等光强曲线

灯具名称: 软灯条	灯具类型: DT 5050 24V60灯 RGB 霓虹 1018 1M 成品	测试编号:
灯具规格: DT 5050 24V60灯 RGB 霓虹 1018 1M 成品	外型尺寸: 1	遮光角:
制造厂商: LEDMY	发光口面: 0.008*1	

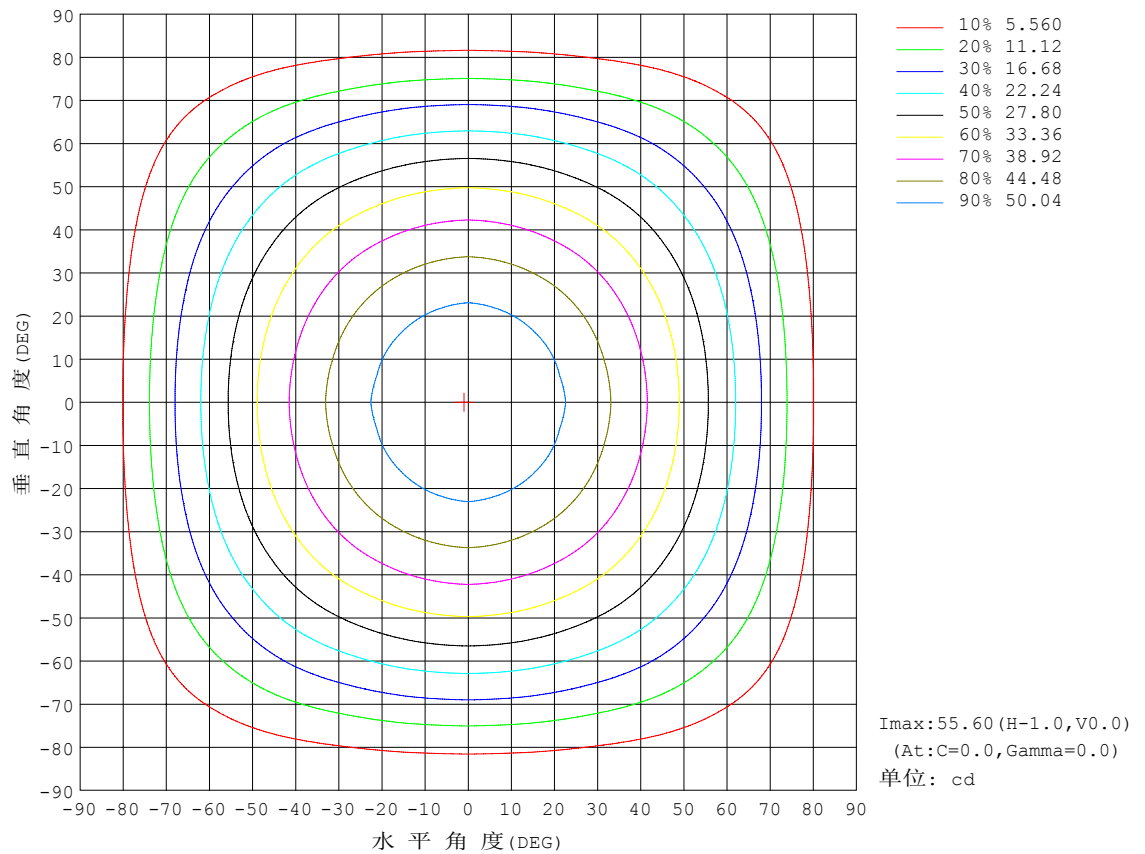


C角度范围: 0度 - 90度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2019-02-12

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.362
环境湿度: 65.0%
测试距离: 12.226米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

灯具名称: 软灯条	灯具类型: DT 5050 24V60灯 RGB 霓虹灯	重量: 1.18 1M 成品
灯具规格: DT 5050 24V60灯 RGB 霓虹 1018 1M 成品	外型尺寸: 1	测试编号:
制造厂商: LEDMY	发光口面: 0.008*1	遮光角:

光通输出: 113.8 lm

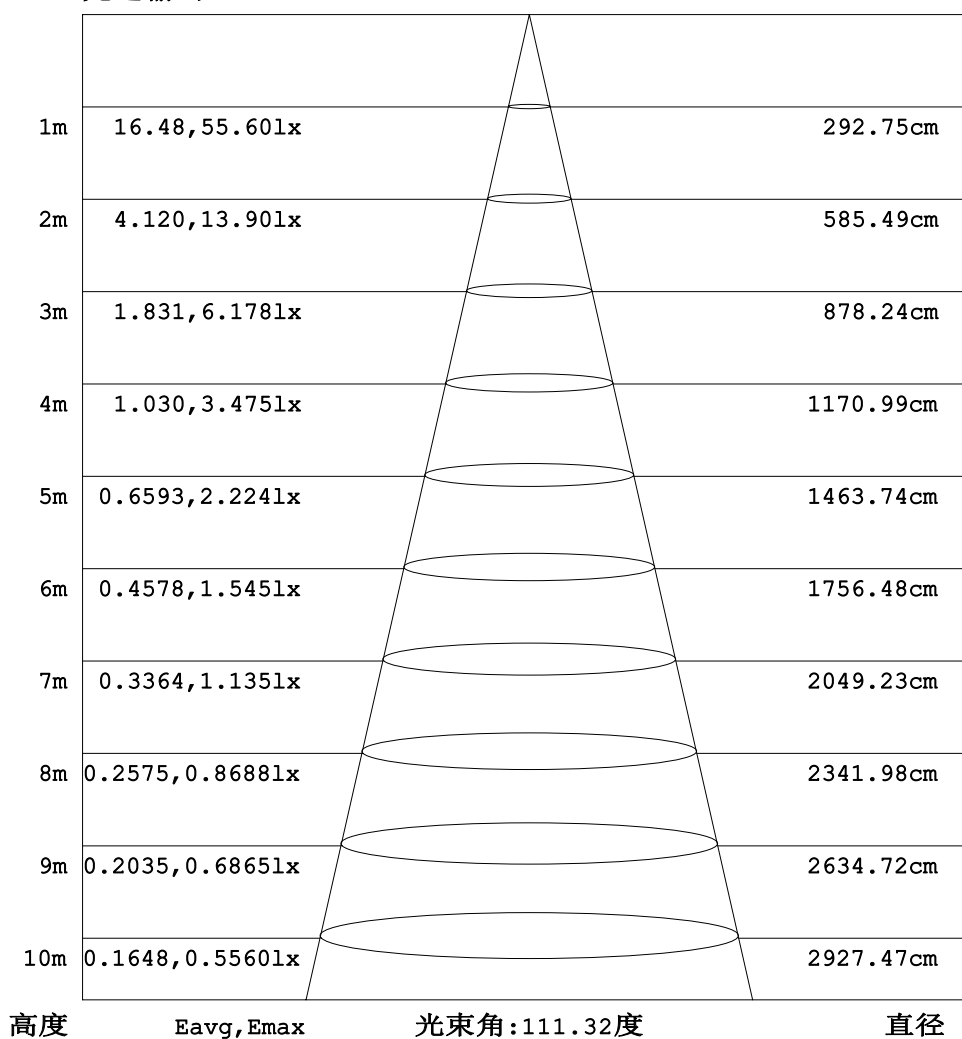


注: 曲线为灯具在不同投射距离下的照射区域及区域内平均照度。

C角度范围: 0度 - 90度
 C角度间隔: 15.0度
 测试速度: 快速
 环境温度: 25.3℃
 测试人员:
 测试日期: 2019-02-12

γ角度范围: 0度 - 180度
 γ角度间隔: 1.0度
 测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.362
 环境湿度: 65.0%
 测试距离: 12.226米 [K=1.0000]
 备注:

平面照度曲线

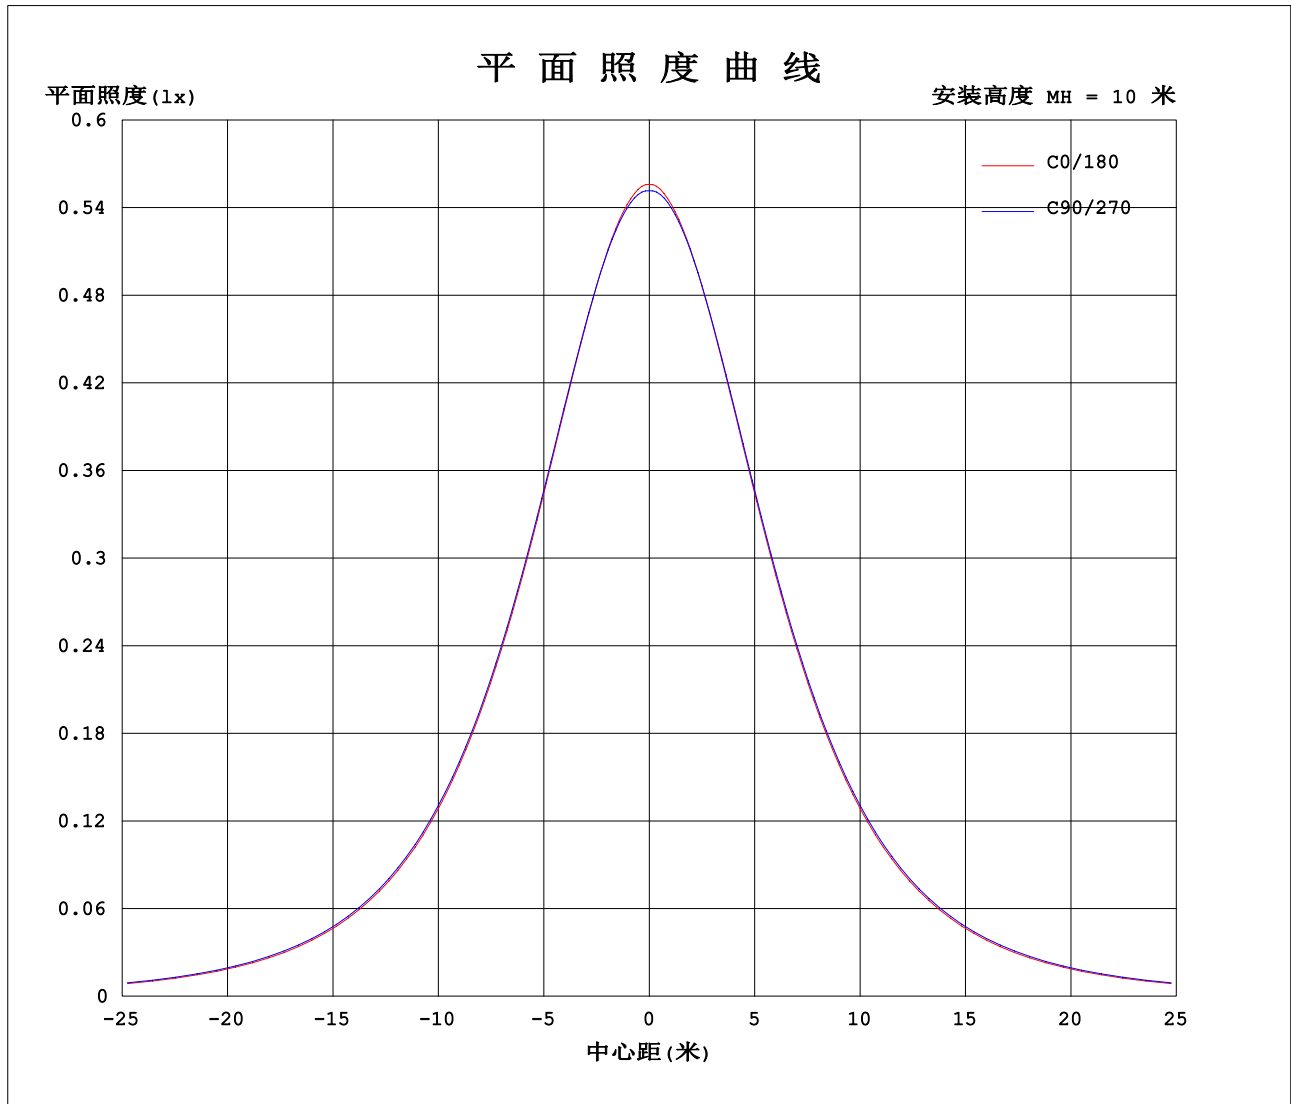

C角度范围: 0度 - 90度
C角度间隔: 15.0度
测试速度: 快速
环境温度: 25.3℃
测试人员:
测试日期: 2019-02-12

γ角度范围: 0度 - 180度
γ角度间隔: 1.0度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.362
环境湿度: 65.0%
测试距离: 12.226米 [K=1.0000]
备注:

光强分布数据表格

灯具名称: 软灯条	灯具类型:DT 5050 24V60灯 RGB 霓虹 1018 1M 成品	
灯具规格:DT 5050 24V60灯 RGB 霓虹 1018 1M 成品	外型尺寸: 1	测试编号:
制造厂商: LEDMY	发光口面:0.008*1	遮光角:

表--1

单位: cd

C (DEG) γ (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	55.6	55.3	55.3	55.2	55.2	55.1	55.2	55.1	55.2	55.2	55.3	55.3	55.6	55.3	55.3	55.2	55.2	55.1	55.2
5	55.2	54.9	55.0	54.8	54.9	54.9	55.0	54.9	54.9	54.8	55.0	54.9	55.2	54.9	55.0	54.8	54.9	54.9	55.0
10	54.3	54.0	54.1	54.0	54.1	54.1	54.2	54.1	54.1	54.0	54.1	54.0	54.3	54.0	54.1	54.0	54.1	54.1	54.2
15	53.0	52.7	52.8	52.7	52.8	52.8	53.0	52.8	52.8	52.7	52.8	52.7	53.0	52.7	52.8	52.7	52.8	52.8	53.0
20	51.1	50.9	51.0	51.0	51.1	51.1	51.3	51.1	51.1	51.0	51.0	50.9	51.1	50.9	51.0	51.0	51.1	51.1	51.3
25	48.9	48.7	48.8	48.8	48.9	49.0	49.2	49.0	48.9	48.8	48.8	48.7	48.9	48.7	48.8	48.8	48.9	49.0	49.2
30	46.3	46.1	46.2	46.2	46.3	46.5	46.6	46.5	46.3	46.2	46.2	46.1	46.3	46.1	46.2	46.2	46.3	46.5	46.6
35	43.3	43.2	43.2	43.3	43.4	43.5	43.7	43.5	43.4	43.3	43.2	43.2	43.3	43.2	43.2	43.3	43.4	43.5	43.7
40	40.0	39.9	39.9	40.0	40.1	40.3	40.5	40.3	40.1	40.0	39.9	39.9	40.0	39.9	39.9	40.0	40.1	40.3	40.5
45	36.4	36.3	36.4	36.5	36.5	36.8	37.0	36.8	36.5	36.5	36.4	36.3	36.4	36.3	36.4	36.5	36.5	36.8	37.0
50	32.5	32.5	32.5	32.7	32.7	33.0	33.1	33.0	32.7	32.7	32.5	32.5	32.5	32.5	32.5	32.7	32.7	33.0	33.1
55	28.4	28.4	28.4	28.6	28.7	28.9	29.1	28.9	28.7	28.6	28.4	28.4	28.4	28.4	28.4	28.6	28.7	28.9	29.1
60	24.0	24.1	24.1	24.3	24.4	24.7	24.8	24.7	24.4	24.3	24.1	24.1	24.0	24.1	24.1	24.3	24.4	24.7	24.8
65	19.5	19.6	19.6	19.8	19.9	20.2	20.4	20.2	19.9	19.8	19.6	19.6	19.5	19.6	19.6	19.8	19.9	20.2	20.4
70	14.8	15.0	15.0	15.3	15.3	15.7	15.8	15.7	15.3	15.3	15.0	15.0	14.8	15.0	15.0	15.3	15.3	15.7	15.8
75	10.1	10.3	10.3	10.6	10.8	11.1	11.2	11.1	10.8	10.6	10.3	10.3	10.1	10.3	10.3	10.6	10.8	11.1	11.2
80	5.63	5.86	5.95	6.24	6.40	6.71	6.82	6.71	6.40	6.24	5.95	5.86	5.63	5.86	5.95	6.24	6.40	6.71	6.82
85	1.95	2.18	2.35	2.63	2.85	3.11	3.22	3.11	2.85	2.63	2.35	2.18	1.95	2.18	2.35	2.63	2.85	3.11	3.22
90	0.14	0.24	0.46	0.57	0.78	0.87	0.97	0.87	0.78	0.57	0.46	0.24	0.14	0.24	0.46	0.57	0.78	0.87	0.97
95	0.15	0.21	0.23	0.25	0.26	0.25	0.25	0.25	0.26	0.25	0.23	0.21	0.15	0.21	0.23	0.25	0.26	0.25	0.25
100	0.15	0.21	0.23	0.28	0.25	0.28	0.23	0.25	0.28	0.23	0.21	0.15	0.21	0.23	0.28	0.25	0.28	0.23	0.23
105	0.22	0.27	0.28	0.32	0.26	0.31	0.26	0.31	0.26	0.32	0.28	0.27	0.22	0.27	0.28	0.32	0.26	0.31	0.26
110	0.25	0.33	0.28	0.37	0.28	0.37	0.26	0.37	0.28	0.37	0.28	0.33	0.25	0.33	0.28	0.37	0.28	0.37	0.26
115	0.30	0.38	0.30	0.41	0.37	0.42	0.32	0.42	0.37	0.41	0.30	0.38	0.30	0.38	0.30	0.41	0.37	0.42	0.32
120	0.39	0.45	0.35	0.46	0.38	0.47	0.39	0.47	0.38	0.46	0.35	0.45	0.39	0.45	0.35	0.46	0.38	0.47	0.39
125	0.41	0.49	0.41	0.52	0.49	0.52	0.41	0.52	0.49	0.52	0.41	0.49	0.41	0.49	0.41	0.52	0.49	0.52	0.41
130	0.48	0.54	0.51	0.56	0.51	0.58	0.49	0.58	0.51	0.56	0.51	0.54	0.48	0.54	0.51	0.56	0.51	0.58	0.49
135	0.53	0.58	0.51	0.61	0.54	0.62	0.53	0.62	0.54	0.61	0.51	0.58	0.53	0.58	0.51	0.61	0.54	0.62	0.53
140	0.52	0.62	0.55	0.66	0.63	0.66	0.55	0.66	0.63	0.66	0.55	0.62	0.52	0.62	0.55	0.66	0.63	0.66	0.55
145	0.55	0.66	0.64	0.70	0.63	0.71	0.61	0.71	0.63	0.70	0.64	0.66	0.55	0.66	0.64	0.70	0.63	0.71	0.61
150	0.62	0.71	0.64	0.74	0.67	0.72	0.63	0.72	0.67	0.74	0.64	0.71	0.62	0.71	0.64	0.74	0.67	0.72	0.63
155	0.63	0.75	0.68	0.78	0.76	0.77	0.66	0.77	0.76	0.78	0.68	0.75	0.63	0.75	0.68	0.78	0.76	0.77	0.66
160	0.66	0.78	0.77	0.81	0.77	0.81	0.74	0.81	0.77	0.81	0.77	0.78	0.66	0.78	0.77	0.81	0.77	0.81	0.74
165	0.73	0.81	0.77	0.84	0.77	0.84	0.76	0.84	0.77	0.84	0.77	0.81	0.73	0.81	0.77	0.84	0.77	0.84	0.76
170	0.76	0.85	0.78	0.88	0.82	0.86	0.78	0.86	0.82	0.88	0.78	0.85	0.76	0.85	0.78	0.88	0.82	0.86	0.78
175	0.80	0.90	0.83	0.91	0.90	0.90	0.89	0.90	0.90	0.91	0.83	0.90	0.80	0.90	0.83	0.91	0.90	0.90	0.89
180	0.90	0.90	0.91	0.91	0.90	0.91	0.90	0.91	0.90	0.91	0.91	0.90	0.90	0.90	0.91	0.91	0.90	0.91	0.90

C角度范围: 0度 - 90度

C角度间隔: 15.0度

测试速度: 快速

环境温度: 25.3℃

测试人员:

测试日期: 2019-02-12

γ角度范围: 0度 - 180度

γ角度间隔: 1.0度

测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.362

环境湿度: 65.0%

测试距离: 12.226米 [K=1.0000]

备注:

光强分布数据表格

灯具名称: 软灯条	灯具类型:DT 5050 24V60灯 RGB 霓虹 1018 1M 成品	
灯具规格:DT 5050 24V60灯 RGB 霓虹 1018 1M 成品	外型尺寸: 1	测试编号:
制造厂商: LEDMY	发光口面:0.008*1	遮光角:

表--2

单位: cd

C (DEG) γ (DEG)	285	300	315	330	345														
0	55.1	55.2	55.2	55.3	55.3														
5	54.9	54.9	54.8	55.0	54.9														
10	54.1	54.1	54.0	54.1	54.0														
15	52.8	52.8	52.7	52.8	52.7														
20	51.1	51.1	51.0	51.0	50.9														
25	49.0	48.9	48.8	48.8	48.7														
30	46.5	46.3	46.2	46.2	46.1														
35	43.5	43.4	43.3	43.2	43.2														
40	40.3	40.1	40.0	39.9	39.9														
45	36.8	36.5	36.5	36.4	36.3														
50	33.0	32.7	32.7	32.5	32.5														
55	28.9	28.7	28.6	28.4	28.4														
60	24.7	24.4	24.3	24.1	24.1														
65	20.2	19.9	19.8	19.6	19.6														
70	15.7	15.3	15.3	15.0	15.0														
75	11.1	10.8	10.6	10.3	10.3														
80	6.71	6.40	6.24	5.95	5.86														
85	3.11	2.85	2.63	2.35	2.18														
90	0.87	0.78	0.57	0.46	0.24														
95	0.25	0.26	0.25	0.23	0.21														
100	0.28	0.25	0.28	0.23	0.21														
105	0.31	0.26	0.32	0.28	0.27														
110	0.37	0.28	0.37	0.28	0.33														
115	0.42	0.37	0.41	0.30	0.38														
120	0.47	0.38	0.46	0.35	0.45														
125	0.52	0.49	0.52	0.41	0.49														
130	0.58	0.51	0.56	0.51	0.54														
135	0.62	0.54	0.61	0.51	0.58														
140	0.66	0.63	0.66	0.55	0.62														
145	0.71	0.63	0.70	0.64	0.66														
150	0.72	0.67	0.74	0.64	0.71														
155	0.77	0.76	0.78	0.68	0.75														
160	0.81	0.77	0.81	0.77	0.78														
165	0.84	0.77	0.84	0.77	0.81														
170	0.86	0.82	0.88	0.78	0.85														
175	0.90	0.90	0.91	0.83	0.90														
180	0.91	0.90	0.91	0.91	0.90														

C角度范围: 0度 - 90度

C角度间隔: 15.0度

测试速度: 快速

环境温度: 25.3℃

测试人员:

测试日期: 2019-02-12

γ角度范围: 0度 - 180度

γ角度间隔: 1.0度

测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.362

环境湿度: 65.0%

测试距离: 12.226米 [K=1.0000]

备注: