




Installation instructions



1. Open hole on the ceiling according to the punch of the light.



2. Connect the brown (L) & blue (N) input wire of power supply to live line & zero line. (Off-power operation)



3. Push springs of light as vertical and embedded lamp into the ceiling.



4. Installation finished.

Attention

1. Entrust trained electricians to install, check and repair the products.
2. Live line work is strictly forbidden when installing, don't touch the joints of metal.
3. The thickness of mounting plate should be within 5-16mm.
4. Installed in ventilated place.
5. When abnormal phenomenon happens, please cut off the power quickly, contact with distributor or manufacturer.
6. This product only indoor use, please pay attention to keep waterproof when outdoor.

Warm prompt

- ※ The lamps can't be covered with heat insulation gasket or similar materials.
- ※ In order to prevent lamp-damage fell, electrical shock, fire which are threatening to personal security, please strictly install and use as the manual, do not transform the lamps randomly and replace the components.
- ※ Avoid installing in the place of heat source, vapor, corrosive gas environment.
- ※ Storage temperature < 70°C, humidity 10%-85%.

Add: 3~5F, Building B, Chuangfu Technology Park, Beihuan Road, Shiyan Town, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755-27658410 27658407

Fax: +86-755-27658502

Web: www.ledmy.com

LED Down Lamp (Concise Series) specification

Dear user


- ※ Thank you for purchasing our products!
- ※ Please carefully read the manual before using the product, keep the manual well for easy reference!

Product overview

- ※ Feature: Concise series LED down lamp is one kind of high-end indoor light: adopt the die casting aluminum coating body, good heat dissipation, COB LED. The lighting design Elegant, luxurious atmosphere, both good lighting effects, but also brings the feeling of beauty. No flickering, even light, no Hg and lead contamination, external power.
- ※ Application: Office, store, shopping mall, hotel, airport, metro, hospital, home, lobby etc.

Product specification and parameter

Concise Series including A/B types, 2. 5inch, 3inch, 4inch, 6inch for choice, as follows.

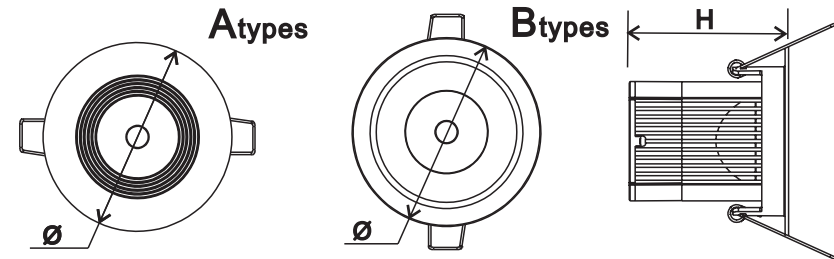

Part Number	Dimension	Punch	Power (included power supply)	Input Voltage
EX-DL-CA-2.5	Φ 82*H74 ± 2mm	Φ 71 ⁺³ ₋₀ mm	5W ± 10%	AC100-240V
EX-DL-CB-2.5				
EX-DL-CA-3	Φ 98*H92 ± 2mm	Φ 84 ⁺³ ₋₀ mm	7W ± 10%	
EX-DL-CB-3				
EX-DL-CA-4	Φ 120*H97 ± 2mm	Φ 104 ⁺³ ₋₀ mm	12W ± 10%	
EX-DL-CB-4				
EX-DL-CA-6	Φ 176*H116 ± 2mm	Φ 150 ⁺³ ₋₀ mm	18W ± 10%	
EX-DL-CB-6				