

Spotless Lighting/ Blue / 10x4mm 10W 24V

Product No. : FEN10M-P7-G1 COBB 24V480S 1004L05

Technical Details

Product No. FEN10M-P7-G1 COBB 24V480S 1004L05

Power	10W/M 3.04W/ft
Voltage	DC24V
CRI	/
Led Qty	480LEDs/M 146LEDs/ft
Length/Reel	5M 16.56ft
Working Temperature	-25~60°C
Storage Temperature	-30~80°C
Voltage Range	23 ~25V dc
Reverse Voltage	25V dc

- Diffuse design, lights soft, COB PCB.
- Bendable at horizontal direction.
- IP67 protection.
- Robust housing with high quality silicon, UV proof for true outdoor application.



Lumens



Color Temperature

● Blue 109lm/m 33lm/ft


Light Distribution

LUMINOUS INTENSITY
DISTRIBUTION DIAGRAM

C0 PLANE ISOLUX
DIAGRAM (UNIT:lx)

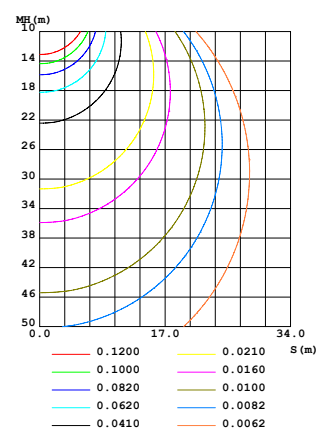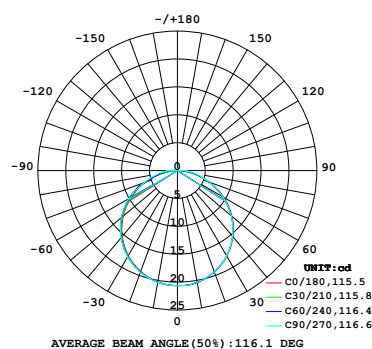


Dimension

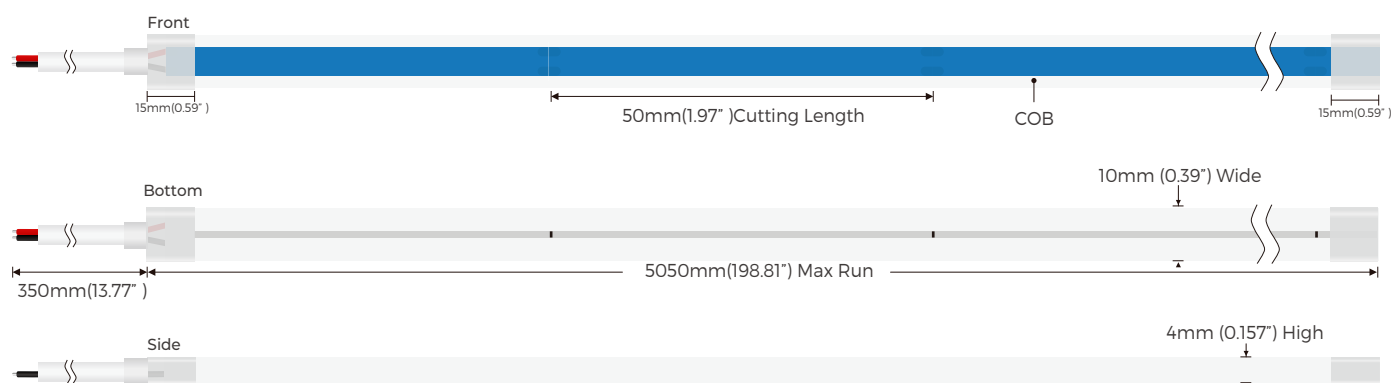


Accessories Specification

Name	Quantity	Note
1. Cap	4pc	
2. Clips	10pc	
3. Glue & Glue nozzle	2pc	
4. Screw	10pc	

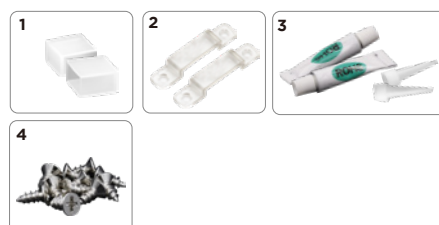


Power Connection Diagram

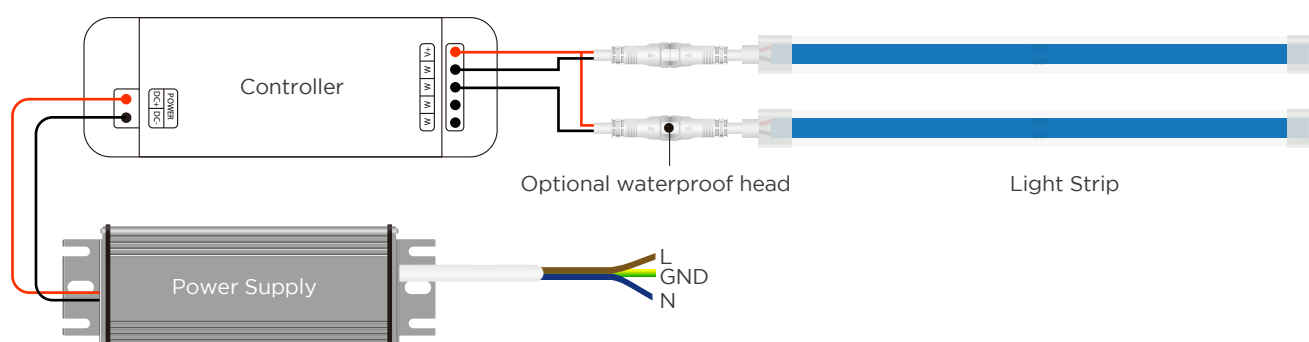

Recommended Power Supplies

Item Number	Description	Input Voltage	Output Voltage	Dimmable	Dimensions
DVH75-24-P7-G1LS AL	Waterproof Driver 75W	220-240	DC24V 3.12A	NO	165×60×36.5mm
DVH100-24-P7-G1 LS AL	Waterproof Driver 100W	220-240	DC24V 4.16A	NO	167×60×34.6mm
DVH150-24-P7-G1 LS AL	Waterproof Driver 150W	220-240	DC24V 6.25A	NO	167×60×34.6mm
DVH200-24-P7-G1LS AL	Waterproof Driver 200W	220-240	DC24V 8.33A	NO	216×65×39.5mm
DVH300-24-P7-G1 LS AL	Waterproof Driver 300W	220-240	DC24V 12.5A	NO	265×65×39.5mm

INSTALLATION

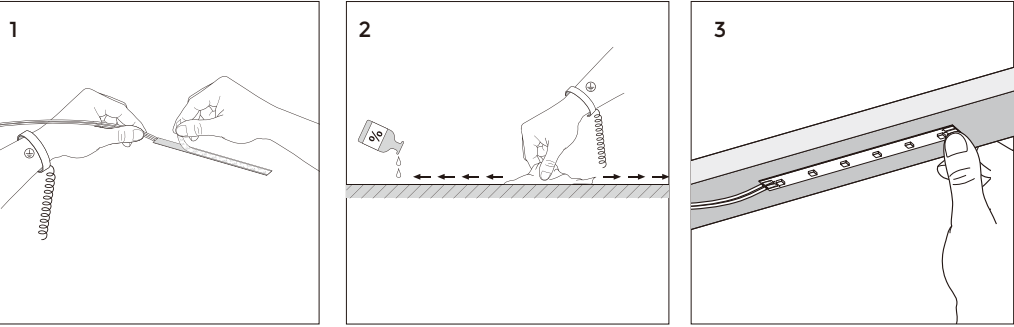

Clean the environment part to be attached with a cloth, as shown in Figure 1, and then tear off the 3M tape on the back of the light belt, and finally stick the light belt on the clean place.

PACKING

N.W /CTN(KG)	QTY / CTN(reel)	G.W/CTN(KG)	CTN Size(mm)
0.25	50	12.7	515x260x545mm
		