



Spotless Lighting / 8x4.5mm 12W 24V IP62


Product No. : FEN12W-P2-G2 22X9X 24V288S8 0845L05

Technical Details

Product No. FEN12W-P2-G2 22X9X 24V288S8 0845L05

Power	12W/M 3.66W/ft
Voltage	DC24V
CRI	90
Led Qty	288LEDs/M 88LEDs/ft
Length/Reel	5M 16.56ft
Working Temperature	-25-60°C
Storage Temperature	-30-80°C
Voltage Range	23 -25V dc
Reverse Voltage	25V dc

- Beam angle 180°.
- High efficacy 2216 Plus LED inside, Uniform luminescence, Spotless.
- Bendable at horizontal direction.
- Extrusion process, 3M tape, Easy installation.

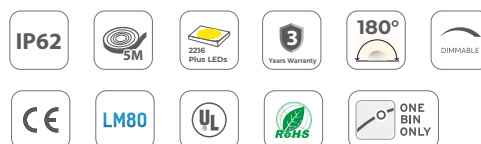


Lumens


Color Temperature		
2700K	1295lm/m	395lm/ft
3000K	1345lm/m	410lm/ft
4000K	1380lm/m	421lm/ft
5000K	1380lm/m	421lm/ft
6000K	1380lm/m	421lm/ft

Light Distribution


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM




C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

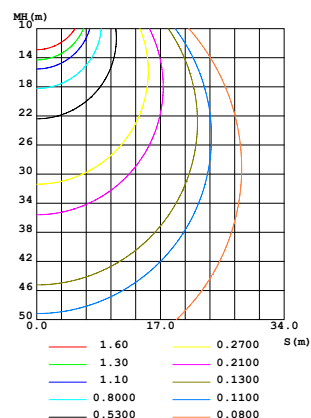

Dimension

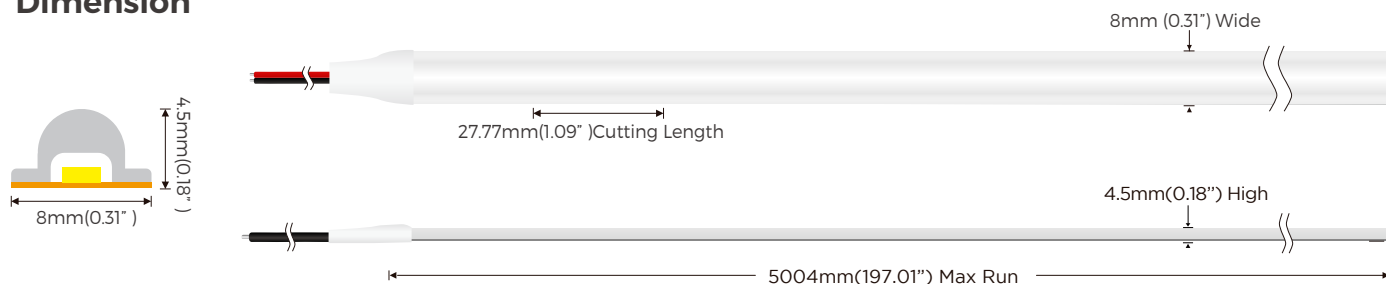


Power Connection Diagram

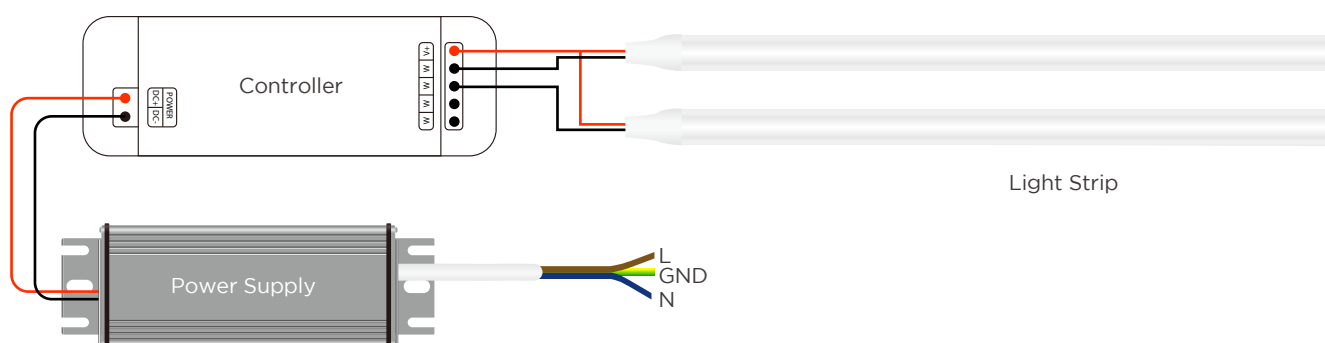

Recommended Power Supplies


Item Number	Description	Input Voltage	Output Voltage	Dimmable	Dimensions
DVH75-24-P7-G1LS AL	Waterproof Driver 75W	220-240	DC24V 3.12A	NO	165×60×36.5mm
DVH100-24-P7-G1 LS AL	Waterproof Driver 100W	220-240	DC24V 4.16A	NO	167×60×34.6mm
DVH150-24-P7-G1 LS AL	Waterproof Driver 150W	220-240	DC24V 6.25A	NO	167×60×34.6mm
DVH200-24-P7-G1LS AL	Waterproof Driver 200W	220-240	DC24V 8.33A	NO	216×65×39.5mm
DVH300-24-P7-G1 LS AL	Waterproof Driver 300W	220-240	DC24V 12.5A	NO	265×65×39.5mm

INSTALL

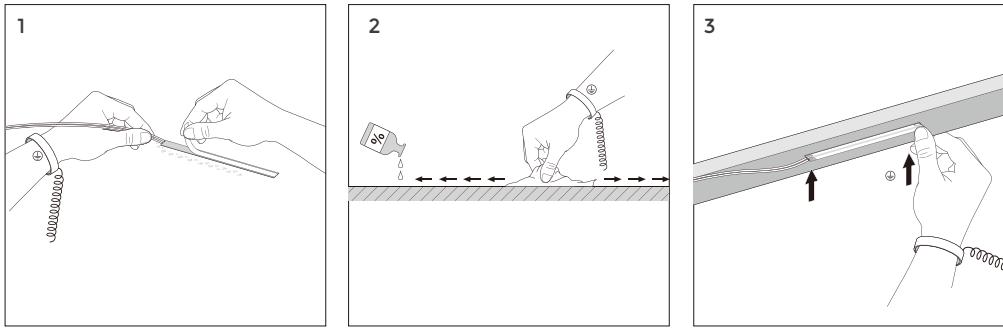

Clean the environment part to be attached with a cloth, as shown in Figure 1, and then tear off the 3M tape on the back of the light belt, and finally stick the light belt on the clean place.

APPLICAITON NOTE

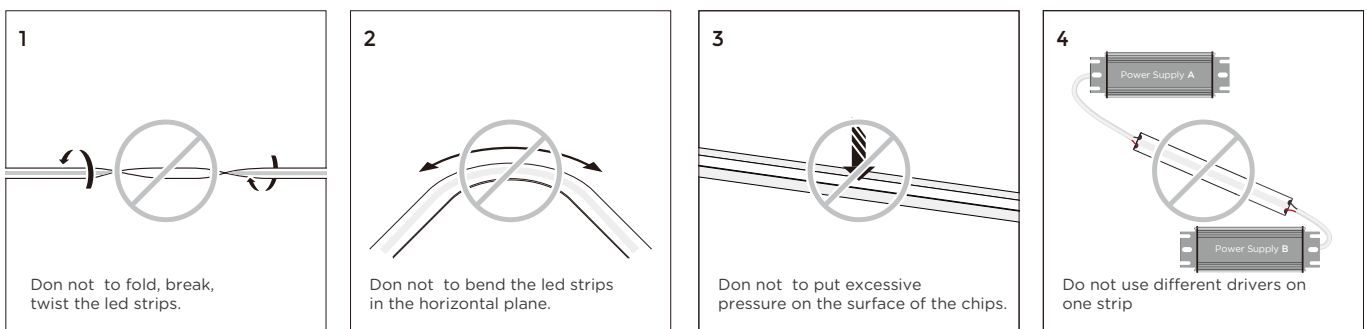

PACKING

N.W /CTN(KG)	QTY / CTN(reel)	G.W/CTN(KG)	CTN Size(cm)
0.195	60	5.85	500x260x380
		