



•FH19W-P8-G1 28HX9x 24V160S8 W10L05




- 8 led/group design, up to 126 lm/w
- 2700-6000K Multi-color temperature optional

TECHNICAL DETAILS

Product No.	FH19W-P8-G1 28HX9x 24V160S8 W10L05
Power	19.2W/M 5.85W/ft
Voltage	DC24V
CRI	90
Led Qty	160LEDs/M
Length/Reel	5M
Working Temperature	-20~50°C
Storage Temperature	-30~80°C
Voltage Range	23 ~25V dc
Reverse Voltage	25V dc


LIGHT DISTRIBUTION

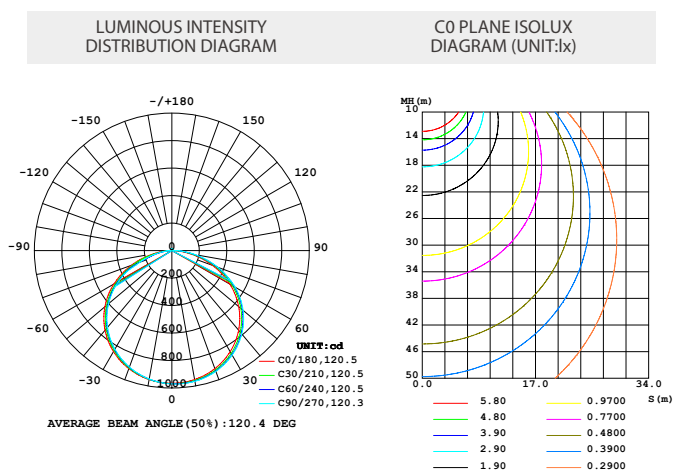

LUMENS PER METER


Color Temperature	
2700K	2100lm
3000K	2246lm
4000K	2419lm
5000K	2420lm
6000K	2323lm

DIMENSION

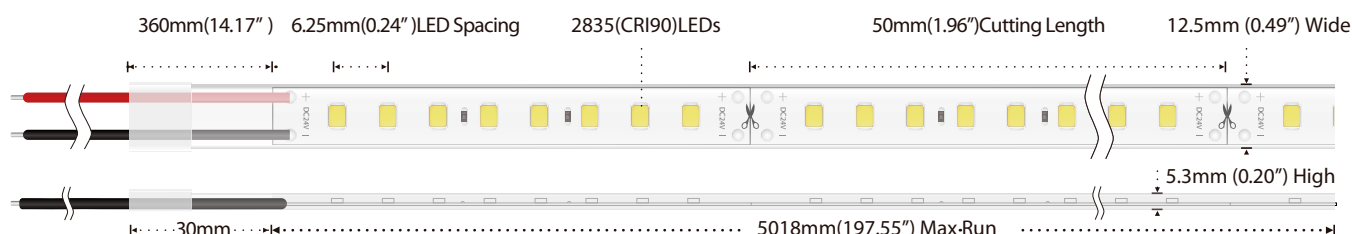


ACCESSORIES SPECIFICATION

Name	Quantity
① Cap	5pc
② Clips	10pc
③ Screw	10pc
④ Glue	1pc
⑤ Glue nozzle	1pc

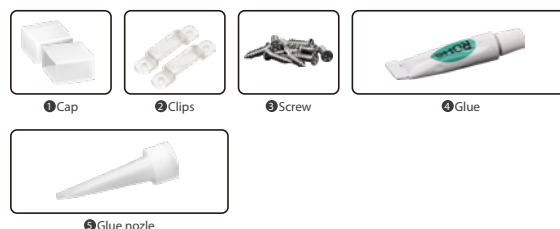

POWER CONNECTION DIAGRAM

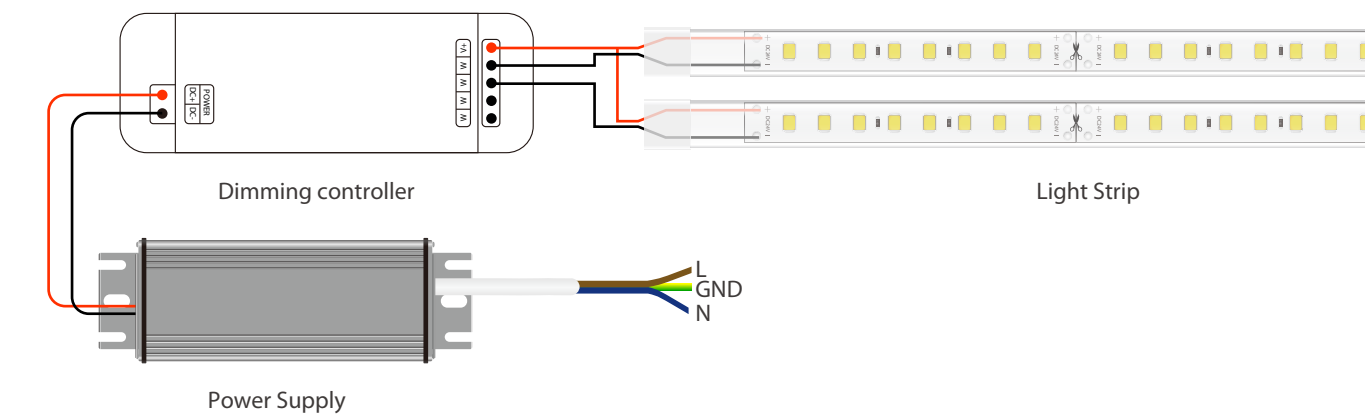


RECOMMENDED POWER SUPPLIES

Item Number	Description	Input Voltage	Output Voltage	Dimmable	Dimensions
DVH30-24-P0-G1 CP PC	Non-waterproof driver 30W	220-240	DC24V 1.25A	NO	160×42×30
DVH60-24-P0-G1 CP PC	Non-waterproof driver 60W	220-240	DC24V 2.5A	NO	187×45×30.5
DVH75-24-P0-G1 CP PC	Non-waterproof driver 75W	220-240	DC24V 3.125A	NO	187×45×30.5
DVH120-24-P0-G1 CP PC	Non-waterproof driver 120W	220-240	DC24V 5.0A	NO	268×45×30.5
DVH150-24-P0-G1 CP PC	Non-waterproof driver 150W	220-240	DC24V 6.25A	NO	268×45×30.5

ALUMINUM PROFILE LIST

Section diagram	install	Product NO.	Slot size	Cover	PCB Width	Power
		15mm×7mm	-	Transarent/Milk	≤ 10mm	≤ 10W/M
		24mm×15mm	21mm×16mm	Transarent/Milk	≤ 12mm	≤ 18W/M
		17mm×15mm	-	Transarent/Milk	≤ 12mm	≤ 16W/M
		16mm×16mm	-	Transarent/Milk	≤ 10mm	≤ 15W/M
		16mm×16mm	-	Transarent/Milk	≤ 10mm	≤ 15W/M
		20mm×20mm	-	Transarent/Milk	≤ 15mm	≤ 15W/M
		20mm×20mm	-	Transarent/Milk	≤ 15mm	≤ 15W/M

INSTALL

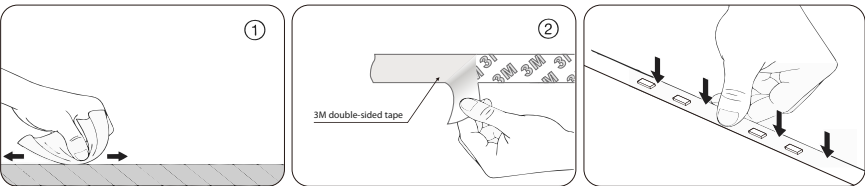

Clean the environment part to be attached with a cloth, as shown in Figure 1, and then tear off the 3M tape on the back of the light belt, and finally stick the light belt on the clean place.

*Please refer to the installation manual for details

PACKING

Electrostatic size(mm)	Net weight (kg)	Box dimension(mm)	bags/Box (Pcs)	Gross weight of each box(kg)
280x260	0.4	500*260*380	30	13.3
		