




FE12W-P0-G1 22X9x 24V180S1 W06L05

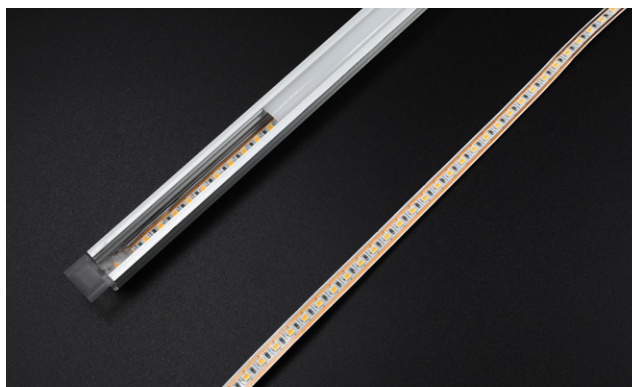


- The light strip can be cut freely.
- A width of 6mm can be installed in narrow installation areas such as cabinets.

TECHNICAL DETAILS

Product No.	FE12W-P0-G1 22X9x 24V180S1 W06L05
Power	12W/M 3.65W/ft
Voltage	DC24V
CRI	90
Led Qty	180LEDs/M
Length/Reel	5M
Working Temperature	-20-50°C
Storage Temperature	-30-80°C
Voltage Range	23 ~24V dc
Reverse Voltage	24V dc

LIGHT DISTRIBUTION

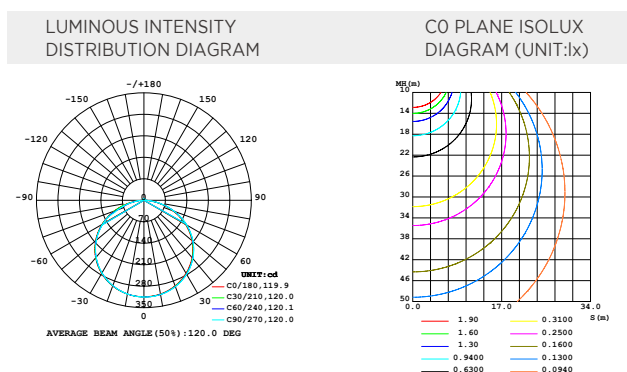


LUMENS PER METER


Color Temperature		
2700K	1080lm/m	329lm/ft
3000K	1110lm/m	338lm/ft
4000K	1140lm/m	347lm/ft
5000K	1140lm/m	347lm/ft
6000K	1140lm/m	347lm/ft

DIMENSION


PCB

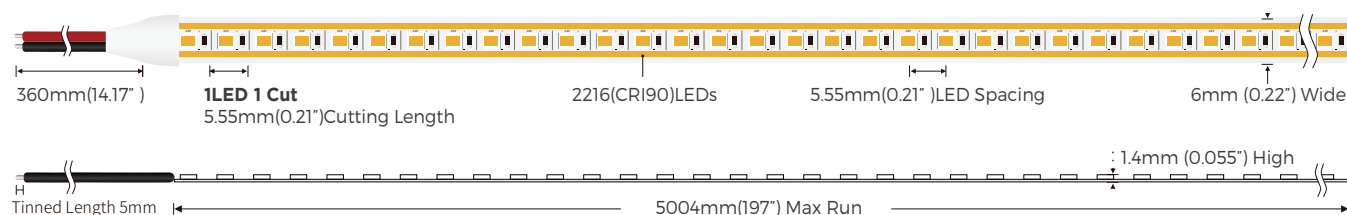

PCB+Aluminum Profile

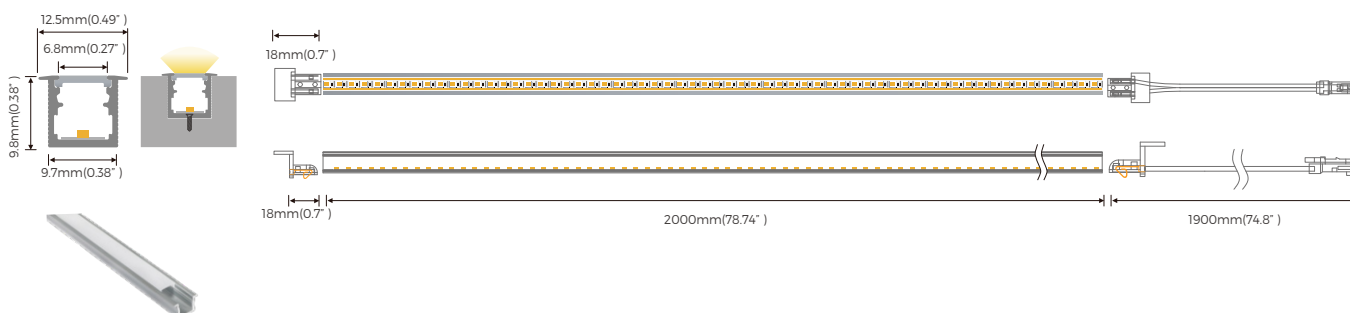


POWER CONNECTION DIAGRAM

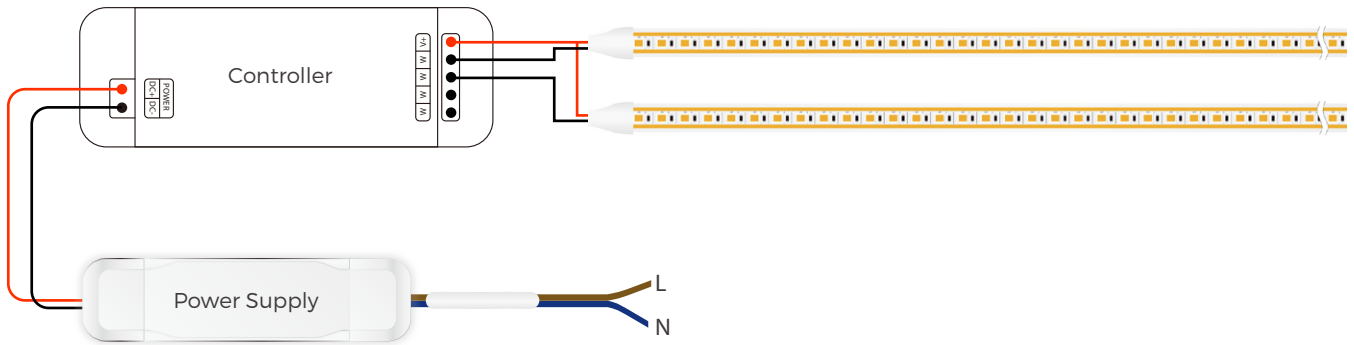


RECOMMENDED POWER SUPPLIES

Item Number	Description	Input Voltage	Output Voltage	Dimmable	Dimensions(L*W*H)
DVH30-24-P0-G1 CP PC	Non-waterproof driver 30W	220-240	DC24V 1.25A	NO	160×42×30mm
DVH60-24-P0-G1 CP PC	Non-waterproof driver 60W	220-240	DC24V 2.5A	NO	187×45×30.5mm
DVH75-24-P0-G1 CP PC	Non-waterproof driver 75W	220-240	DC24V 3.125A	NO	187×45×30.5mm
DVH120-24-P0-G1 CP PC	Non-waterproof driver 120W	220-240	DC24V 5.0A	NO	268×45×30.5mm
DVH150-24-P0-G1 CP PC	Non-waterproof driver 150W	220-240	DC24V 6.25A	NO	268×45×30.5mm

INSTALLATION

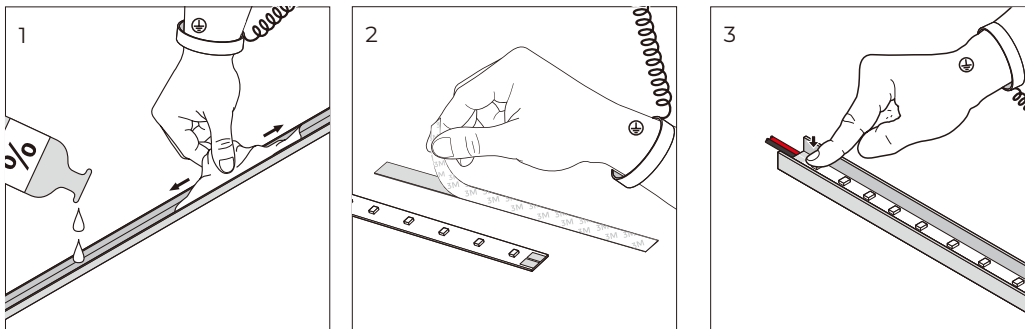

CUTTING

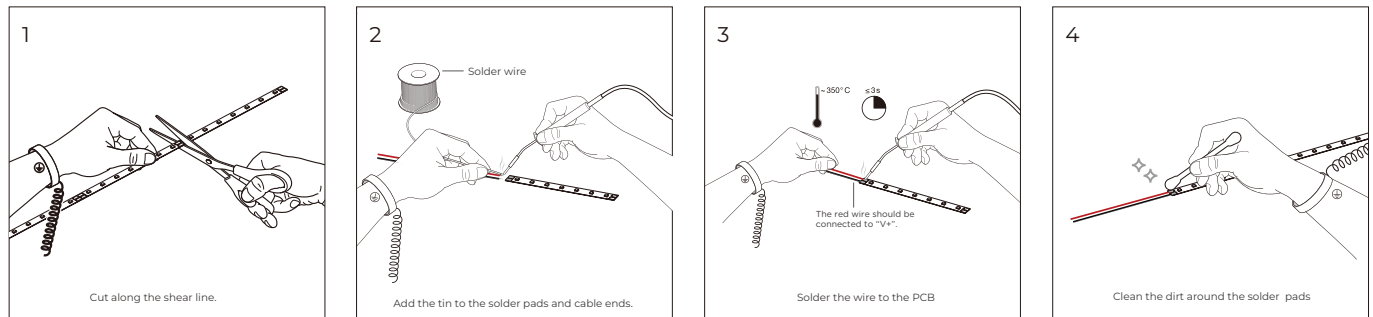

PACKING

N.W /CTN(KG)	G.W/CTN(KG)	QTY / CTN(reel)	CTN Size(mm)
/	/	/	/

