



1 LED 1 Cut

Top Bending



Side Bending

3D Bending Wall washer - 24x18mm / 26W / 24V / IP67

Product No. : FHW26WTS-P7-G1 30YL9xx 24V24S1 2418L05 Dx

- 3D bending and top lighting.
- Free cutting, 1 LED 1 cutting.
- IP67 and Easy installation.
- Min top bending diameter 100mm, Min side bending diameter 300mm.
- Beam angles of 20°, 30°, 40°, 15°x40° are available.



20°, 30°,
40°, 15°x40°

TECHNICAL DETAILS

Product No. FHW26WTS-P7-G1 30YL9xx 24V24S1 2418L05 Dx

Power 26W/M 7.93W/ft

Voltage DC24V

RA 90(3030LEDs)

Led Qty 24LEDs/M 7LEDs/ft

Length/Reel 5M 16.4ft

Working Temperature -40°C ~ +65°C


Storage Temperature -40°C ~ +85°C

Voltage Range 23 ~25V dc


Reverse Voltage 25V dc

LIGHT DISTRIBUTION

LUMINOUS INTENSITY
DISTRIBUTION DIAGRAM





CO PLANE ISOLUX
DIAGRAM (UNIT:lx)

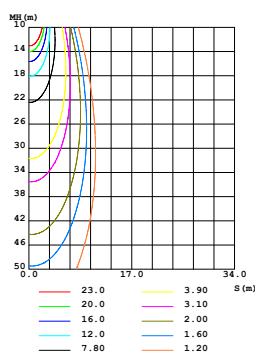


LUMENS

	20°	30°	40°	15x40°
2700K	1820lm/m 555lm/ft	1845 lm/m 565lm/ft	1665lm/m 510lm/ft	1560lm/m 475lm/ft
3000K	1845lm/m 560lm/ft	1870 lm/m 570lm/ft	1715lm/m 520lm/ft	1610lm/m 490lm/ft
4000K	2155lm/m 657lm/ft	2210lm/m 675lm/ft	2025lm/m 617lm/ft	1790lm/m 545lm/ft
6000K	2155lm/m 657lm/ft	2210lm/m 675lm/ft	2025lm/m 617lm/ft	1790lm/m 545lm/ft

DIMENSION

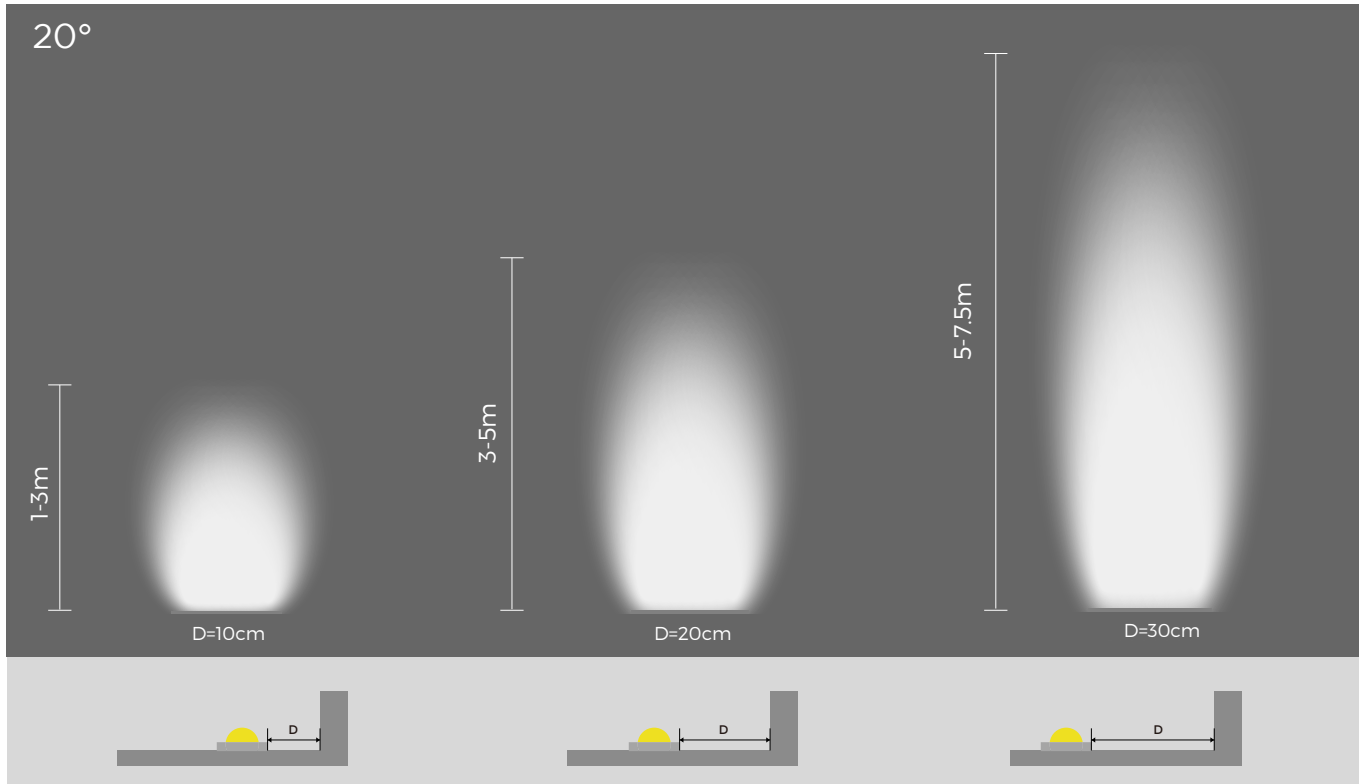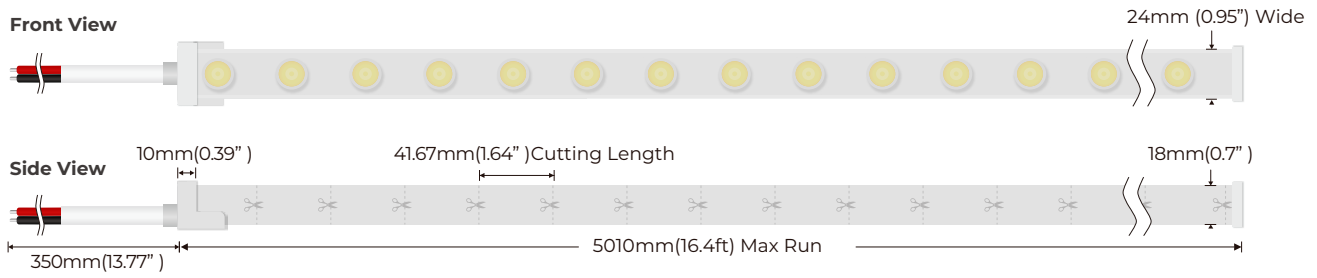

Power connection diagram

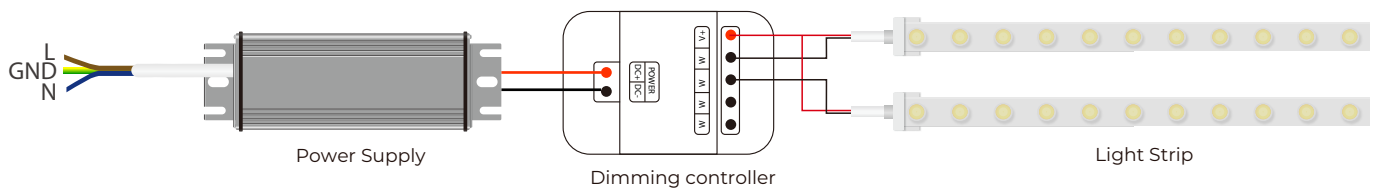


RECOMMENDED POWER SUPPLIES


Item Number	Description	Input Voltage	Output Voltage	Dimmable	Dimensions
DVH75-24-P7-G1LS AL	Waterproof Driver 75W	220-240	DC24V 3.12A	NO	165×60×36.5
DVH100-24-P7-G1 LS AL	Waterproof Driver 100W	220-240	DC24V 4.16A	NO	167×60×34.6
DVH150-24-P7-G1 LS AL	Waterproof Driver 150W	220-240	DC24V 6.25A	NO	167×60×34.6
DVH200-24-P7-G1LS AL	Waterproof Driver 200W	220-240	DC24V 8.33A	NO	216×65×39.5
DVH300-24-P7-G1 LS AL	Waterproof Driver 300W	220-240	DC24V 12.5A	NO	265×65×39.5

CONNECTORS

End feeder



End cap




ALUMINUM PROFILE LIST

	Product NO.	Section diagram		install
AL profile	21.5×27.2mm			
	21.5×27.2mm			
Stainless installation chain	21.5×27.2mm			

Installation

① Clip


Fix the clips and aluminum profile via the screws.

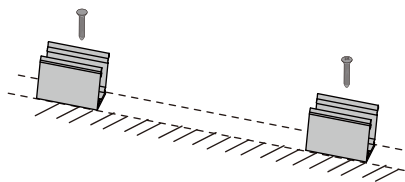


⚠ Suggestion: 2pcs clips per meter.

② Neon Series


Simultaneously install the neon from both ends.



Should use tools to assist when remove the neon.



3D bending series correct bending way.

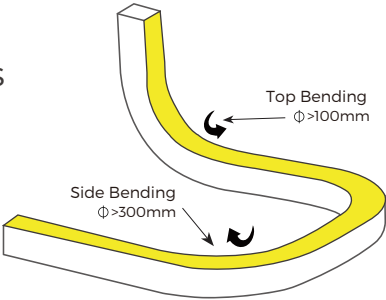

PACKING

N.W /CTN(KG)	QTY / CTN(reel)	G.W/CTN(KG)	CTN Size(mm)
2.3	5	11.5	636x400x230
		