

Pickled ham




FH14M-PO-G1 28HZME 24V192S8 W10L05



TECHNICAL DETAILS

Product No.	FH14M-PO-G1 28HZME 24V192S8 W10L05
Power	14W/M 4.26W/ft
Voltage	DC24V
CRI	-
Led Qty	192LEDs/M
Length/Reel	5M
Working Temperature	-20~50°C
Storage Temperature	-30~80°C
Voltage Range	23 ~24V dc
Reverse Voltage	24V dc

DIMENSION

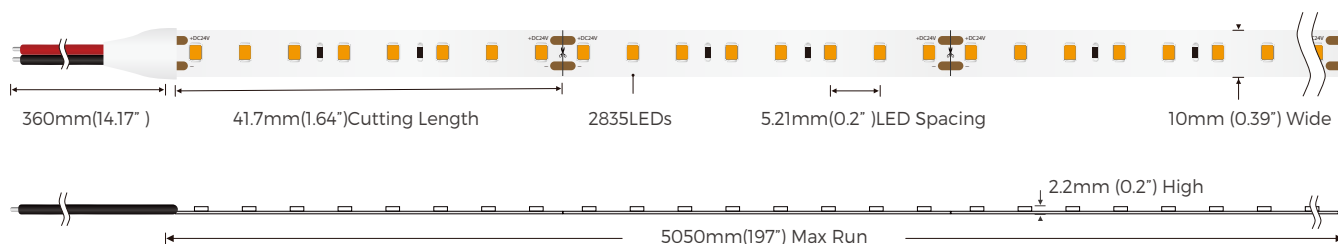

ACCESSORIES

Connectors		
Name	Product	Item Number
LD-SE Series		LD-SE-N8XB-2 LD-SE-N8BB-2


* Please contact us for more detailed connector information.

- Transform your space into the perfect setting in seconds, ideal for photographing delicious cured ham and making it look even more appetizing.


LUMENS PER METER

Color Temperature	
Pickled ham	2100lm
Prpcp WL	Ld=494.1nm
Peak WL	Lp=452nm


SPECTRUM

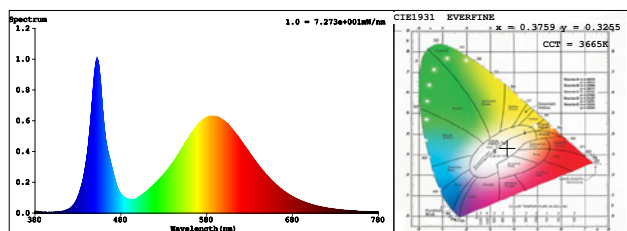

LIGHT DISTRIBUTION

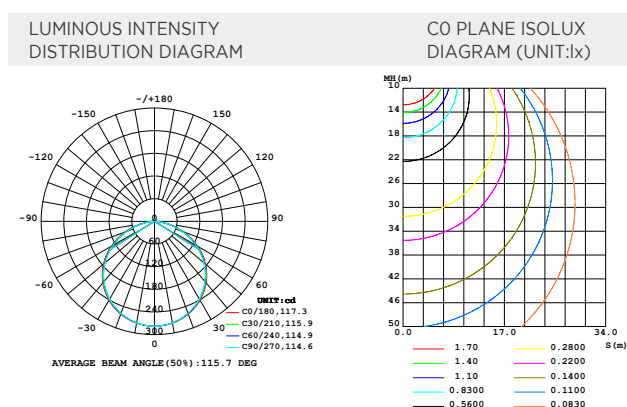

POWER CONNECTION DIAGRAM

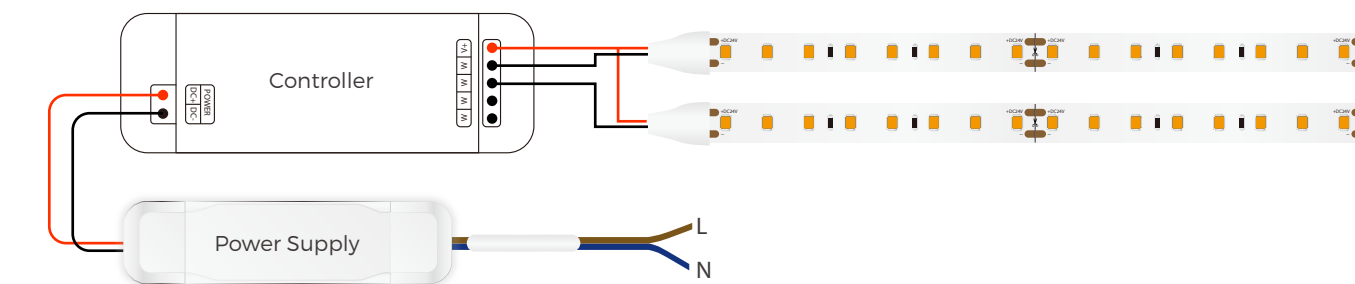

RECOMMENDED POWER SUPPLIES


Item Number	Description	Input Voltage	Output Voltage	Dimmable	Dimensions(L*W*H)
DVH30-24-P0-G1 CP PC	Non-waterproof driver 30W	220-240	DC24V 1.25A	NO	160×42×30mm
DVH60-24-P0-G1 CP PC	Non-waterproof driver 60W	220-240	DC24V 2.5A	NO	187×45×30.5mm
DVH75-24-P0-G1 CP PC	Non-waterproof driver 75W	220-240	DC24V 3.125A	NO	187×45×30.5mm
DVH120-24-P0-G1 CP PC	Non-waterproof driver 120W	220-240	DC24V 5.0A	NO	268×45×30.5mm
DVH150-24-P0-G1 CP PC	Non-waterproof driver 150W	220-240	DC24V 6.25A	NO	268×45×30.5mm

RECOMMENDED ALUMINUM PROFILE

Cover: Transarent/Milky


Section diagram	Installation	Size	Slot size	PCB Width	Power
		15mm×7mm	-	≤ 10mm	≤ 10W/M
		24mm×15mm	21mm×16mm	≤ 12mm	≤ 18W/M
		17mm×15mm	-	≤ 12mm	≤ 16W/M
		16mm×16mm	-	≤ 10mm	≤ 15W/M
		16mm×16mm	-	≤ 10mm	≤ 15W/M
		20mm×20mm	-	≤ 15mm	≤ 15W/M
		20mm×20mm	-	≤ 15mm	≤ 15W/M

INSTALLATION

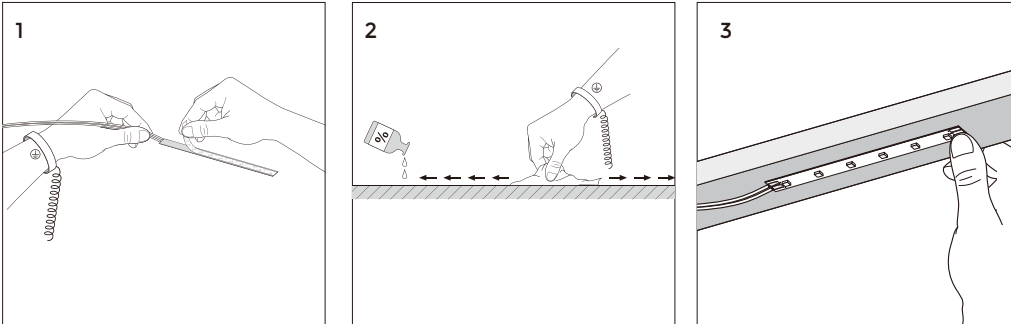

Clean the environment part to be attached with a cloth, as shown in Figure 1, and then tear off the 3M tape on the back of the light belt, and finally stick the light belt on the clean place.

CUTTING

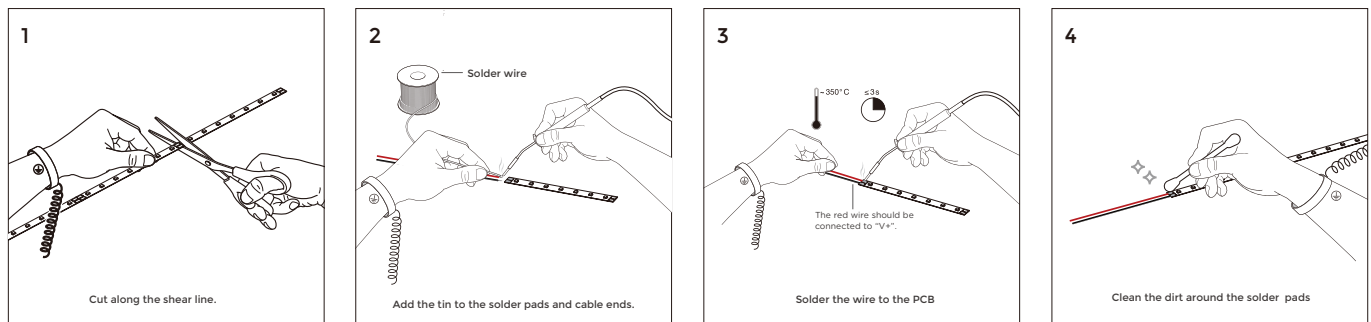

PACKING

N.W /CTN(KG)	G.W/CTN(KG)	QTY / CTN(reel)	CTN Size(cm)
0.25	6.3	25	500×260×380

